

Tehničke karakteristike proizvoda

Karakteristike

9001KR1U

Head for spring return push button, Harmony
9001K, metal, flush, 7 colours choice, 30mm



Osnovne informacije

Grupa proizvoda	Harmony 9001K
Tip proizvoda ili komponente	Glava za taster
Kratko ime uređaja	9001K
Profil glave uređaja	Udubljena, neoznačeno
Dodatne informacije o glavi uređaja	Metal guard

Dopunske informacije

Prečnik za montiranje	30 mm
Oblik glave signalne jedinice	Okrugla
Tip glave uređaja	Sa povratkom
Masa proizvoda	0,087 kg
Materijal podnožja	Metal
Boja kapica/glave ili sočiva	Izbor 7 boja
Tip glave	Udubljena
Tip ručice	Sa povratkom
Tip kontakata i sastav	Bez kontaktnog bloka

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9,500 cm
Package 1 Width	5,500 cm
Package 1 Length	5,000 cm
Package 1 Weight	102,000 g
Unit Type of Package 2	S01
Number of Units in Package 2	24
Package 2 Height	15,000 cm
Package 2 Width	15,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	2,622 kg


Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Ugovorna garancija


Garancija	18 months
-----------	-----------

Dimensions

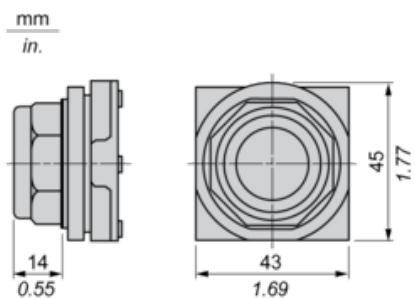

Contact Block Mounting Position


Top and Rear views

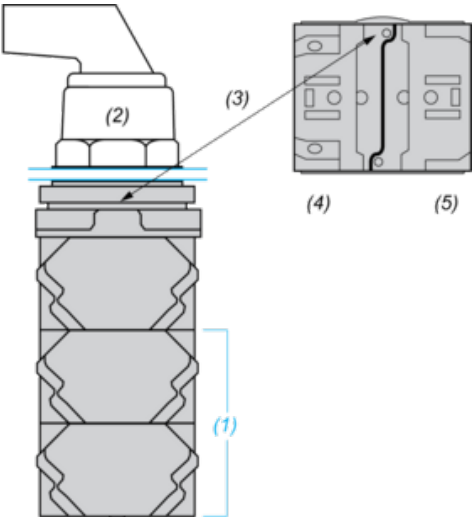

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)
- (2) Operator
- (3) Locating notch
- (4) Side 1
- (5) Side 2

Panel Cut-Out

Clearance

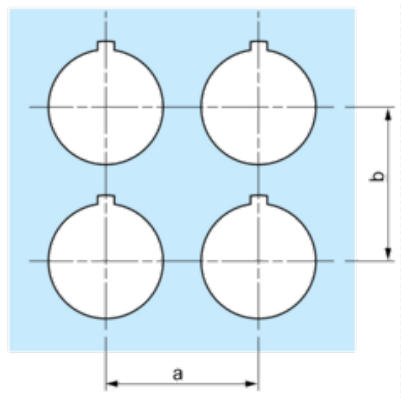

Legend plate	a min.		b min.	
	mm	in.	mm	in.
9001KN2••	57.2	2.25	44.5	1.75
9001KN3••	57.2	2.25	50.8	2.00

Individual Cut-outs Details

2 alternatives

mm
in.

