

Tehničke karakteristike proizvoda

Karakteristike

BSH0702T02A2A

servo motor BSH, Lexium 05, 2.12N.m,
6000rpm, 70mm, untapped shaft, Sincos multi
turn, without brake, IP50





Osnovne informacije

Tip proizvoda ili komponente	Servo motor
Kratko ime uređaja	BSH
Maksimalna mehanička brzina	8000 rpm
Stalni moment pri nultoj brzini	2,2 N.M za LXM32.D30M2 pri 10 A, 115 V, monofazno 2,12 N.M za LXM05AD17M2, 200...240 V, monofazno 2,12 N.M za LXM05BD17M2, 200...240 V, monofazno 2,12 N.M za LXM05CD17M2, 200...240 V, monofazno 2,2 N.M za LXM32.D18M2 pri 6 A, 230 V, monofazno 2,12 N.M za LXM05AD17F1, 110...120 V, monofazno 2,12 N.M za LXM05AD28M2, 200...240 V, monofazno 2,12 N.M za LXM05BD17F1, 110...120 V, monofazno 2,12 N.M za LXM05BD28M2, 200...240 V, monofazno 2,12 N.M za LXM05CD17F1, 110...120 V, monofazno 2,12 N.M za LXM05CD28M2, 200...240 V, monofazno 2,12 N.M za LXM15LD17N4, 230 V, trofazno 2,12 N.M za LXM15LD21M3, 230 V, trofazno 2,12 N.M za LXM05AD42M3X, 200...240 V, trofazno 2,12 N.M za LXM05BD42M3X, 200...240 V, trofazno 2,12 N.M za LXM05CD42M3X, 200...240 V, trofazno
Vršni moment pri nultoj brzini	6,1 N.M za LXM32.D30M2 pri 10 A, 115 V, monofazno 7,2 N.M za LXM32.D18M2 pri 6 A, 230 V, monofazno 4,14 N.M za LXM05AD17F1, 110...120 V, monofazno 4,14 N.M za LXM05AD17M2, 200...240 V, monofazno 4,14 N.M za LXM05BD17F1, 110...120 V, monofazno 4,14 N.M za LXM05BD17M2, 200...240 V, monofazno 4,14 N.M za LXM05CD17F1, 110...120 V, monofazno 4,14 N.M za LXM05CD17M2, 200...240 V, monofazno 6,8 N.M za LXM05AD28M2, 200...240 V, monofazno 6,8 N.M za LXM05BD28M2, 200...240 V, monofazno 6,8 N.M za LXM05CD28M2, 200...240 V, monofazno 4,47 N.M za LXM15LD17N4, 230 V, trofazno 5,45 N.M za LXM15LD21M3, 230 V, trofazno 6,8 N.M za LXM05AD42M3X, 200...240 V, trofazno 6,8 N.M za LXM05BD42M3X, 200...240 V, trofazno 6,8 N.M za LXM05CD42M3X, 200...240 V, trofazno

Nazivna izlazna snaga	550 W za LXM32.D30M2 pri 10 A, 115 V, monofazno 600 W za LXM05AD17M2, 200...240 V, monofazno 600 W za LXM05BD17M2, 200...240 V, monofazno 600 W za LXM05CD17M2, 200...240 V, monofazno 570 W za LXM05AD17F1, 110...120 V, monofazno 570 W za LXM05BD17F1, 110...120 V, monofazno 570 W za LXM05CD17F1, 110...120 V, monofazno 600 W za LXM05AD28M2, 200...240 V, monofazno 600 W za LXM05BD28M2, 200...240 V, monofazno 600 W za LXM05CD28M2, 200...240 V, monofazno 950 W za LXM32.D18M2 pri 6 A, 230 V, monofazno 1000 W za LXM15LD17N4, 230 V, trofazno 1000 W za LXM15LD21M3, 230 V, trofazno 600 W za LXM05AD42M3X, 200...240 V, trofazno 600 W za LXM05BD42M3X, 200...240 V, trofazno 600 W za LXM05CD42M3X, 200...240 V, trofazno
Nazivni moment	2,07 N.M za LXM32.D30M2 pri 10 A, 115 V, monofazno 1,9 N.M za LXM05AD17M2, 200...240 V, monofazno 1,9 N.M za LXM05BD17M2, 200...240 V, monofazno 1,9 N.M za LXM05CD17M2, 200...240 V, monofazno 1,83 N.M za LXM05AD17F1, 110...120 V, monofazno 1,83 N.M za LXM05BD17F1, 110...120 V, monofazno 1,83 N.M za LXM05CD17F1, 110...120 V, monofazno 1,9 N.M za LXM05AD28M2, 200...240 V, monofazno 1,9 N.M za LXM05BD28M2, 200...240 V, monofazno 1,9 N.M za LXM05CD28M2, 200...240 V, monofazno 1,8 N.M za LXM32.D18M2 pri 6 A, 230 V, monofazno 1,66 N.M za LXM15LD17N4, 230 V, trofazno 1,66 N.M za LXM15LD21M3, 230 V, trofazno 1,9 N.M za LXM05AD42M3X, 200...240 V, trofazno 1,9 N.M za LXM05BD42M3X, 200...240 V, trofazno 1,9 N.M za LXM05CD42M3X, 200...240 V, trofazno
Nazivna brzina	2500 rpm za LXM32.D30M2 pri 10 A, 115 V, monofazno 3000 rpm za LXM05AD17F1, 110...120 V, monofazno 3000 rpm za LXM05BD17F1, 110...120 V, monofazno 3000 rpm za LXM05CD17F1, 110...120 V, monofazno 3000 rpm za LXM05AD17M2, 200...240 V, monofazno 3000 rpm za LXM05BD17M2, 200...240 V, monofazno 3000 rpm za LXM05CD17M2, 200...240 V, monofazno 3000 rpm za LXM05AD28M2, 200...240 V, monofazno 3000 rpm za LXM05BD28M2, 200...240 V, monofazno 3000 rpm za LXM05CD28M2, 200...240 V, monofazno 5000 rpm za LXM32.D18M2 pri 6 A, 230 V, monofazno 3000 rpm za LXM05AD42M3X, 200...240 V, trofazno 3000 rpm za LXM05BD42M3X, 200...240 V, trofazno 3000 rpm za LXM05CD42M3X, 200...240 V, trofazno 6000 rpm za LXM15LD17N4, 230 V, trofazno 6000 rpm za LXM15LD21M3, 230 V, trofazno

Kompatibilnost proizvoda	LXM05AD17F1 pri 110...120 V monofazno LXM05AD17M2 pri 200...240 V monofazno LXM05AD28M2 pri 200...240 V monofazno LXM05BD17F1 pri 110...120 V monofazno LXM05BD17M2 pri 200...240 V monofazno LXM05BD28M2 pri 200...240 V monofazno LXM05CD17F1 pri 110...120 V monofazno LXM05CD17M2 pri 200...240 V monofazno LXM05CD28M2 pri 200...240 V monofazno LXM32.D30M2 pri 115 V monofazno LXM32.D18M2 pri 230 V monofazno LXM15LD21M3 pri 230 V trofazno LXM05AD42M3X pri 200...240 V trofazno LXM05BD42M3X pri 200...240 V trofazno LXM05CD42M3X pri 200...240 V trofazno LXM15LD17N4 pri 230 V trofazno
Vratilo	Gladak
Ip stepen zaštite	IP50 standardno
Rezolucija brzine u povratnoj sprezi	131072 tačaka/obrtaju x 4096 obrtaja
Kočnica držanja	Bez
Nosači za montažu	Prirubnica po međunarodnom standardu
Električni priključak	Rotirajući konektori pod pravim uglom

Dopunske informacije

Kompatibilnost grupe proizvoda	Lexium 32 Lexium 05 Lexium 15
Supply voltage max	480 V
Broj faza mreže	Trofazno
Stalna struja pri ukočenom rotoru	4,9 A
Maximum continuous power	1,51 W
Maksimalna struja irms	20,6 A za LXM15LD21M3 20,6 A za LXM15LD17N4 19,9 A za LXM05AD17F1 19,9 A za LXM05AD17M2 19,9 A za LXM05AD28M2 19,9 A za LXM05AD42M3X 19,9 A za LXM05BD17F1 19,9 A za LXM05BD17M2 19,9 A za LXM05BD28M2 19,9 A za LXM05BD42M3X 19,9 A za LXM05CD17F1 19,9 A za LXM05CD17M2 19,9 A za LXM05CD28M2 19,9 A za LXM05CD42M3X 15 A za LXM32.D30M2 18 A za LXM32.D18M2
Maksimalna stalna struja	19,9 A
Frekvencija preklapanja	8 kHz
Druga osovin	Bez drugog vratila
Prečnik osovine	11 mm
Dužina osovine	23 mm
Tip povratne sprege	Višeobrtajni SinCos Hiperface
Veličina prirubnice motora	70 mm
Broj naslaganih rotora i statora motora	2
Konstanta momenta	0,45 N.m/A pri 120 °C
Ke (indukovana ems)	28 V/krpm pri 120 °C
Broj polova motora	6
Inercija rotora	0,41 kg.cm ²
Otpornost statora	1,5 Ω pri 20 °C
Induktivnost statora	6,7 mH pri 20 °C
Električna vremenska konstanta statora	4,47 milisekundi pri 20 °C

Maksimalna radijalna sila fr	390 N pri 6000 rpm 410 N pri 5000 rpm 450 N pri 4000 rpm 490 N pri 3000 rpm 560 N pri 2000 rpm 710 N pri 1000 rpm
Maksimalna osovinska sila fa	0.2 x Fr
Tip hlađenja	Prirodno strujanje vazduha
Dužina	187 mm
Prečnik priрубnice	60 mm
Dubina priрубnice	2,5 mm
Broj otvora za montažu	4
Prečnik otvora za montiranje	5,5 mm
Prečnik kruga za otvore	82 mm
Masa proizvoda	2,89 kg

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12,3 cm
Package 1 Width	12,8 cm
Package 1 Length	37,7 cm
Package 1 Weight	2,8 kg


Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.
Bez PVC	Da

Ugovorna garancija

Garancija	18 months
-----------	-----------

Example with Straight Connectors

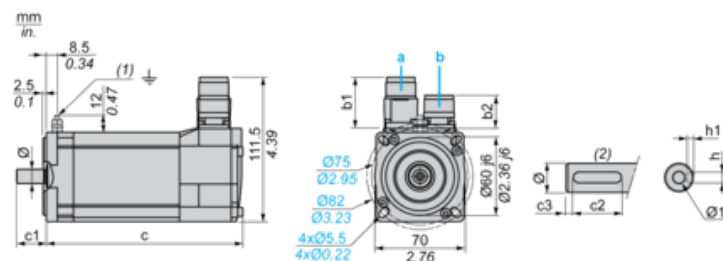

b: Power supply for servo motor encoder

(1) M4 screw

(2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	c3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2									
39.5	25.5	39.5	39.5	187	213	23	18	2.5	4 N9	2.5 ^{+0.1} ₀	11 k6	M4 x 10


Dimensions in in.

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	c3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2									
1.55	1.00	1.55	1.55	7.36	8.38	0.90	0.70	0.09	0.16 N9	0.01 ^{+0.004} ₀	0.43 k6	M4 x 0.39

115 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive

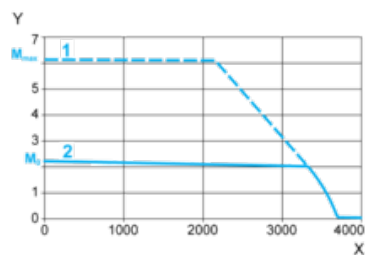

X Speed in rpm

Y Torque in Nm


1 Peak torque

2 Continuous torque

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D18M2 servo drive

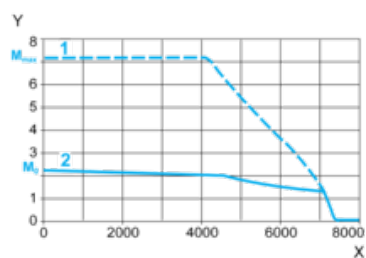

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque