

## Tehničke karakteristike proizvoda

### Karakteristike

## 9001KS11FB

Head for selector switch, Harmony 9001K,  
metal, long handle, black, 30mm, 2 positions,  
stay put



### Osnovne informacije

|                              |                           |
|------------------------------|---------------------------|
| Grupa proizvoda              | Harmony 9001K             |
| Tip proizvoda ili komponente | Glava za izborni prekidač |
| Kratko ime uređaja           | 9001K                     |
| Tip glave uređaja            | Bez povratka              |
| Profil glave uređaja         | Crna duga ručica          |

### Dopunske informacije

|                               |                        |
|-------------------------------|------------------------|
| Materijal podnožja            | Metal                  |
| Prečnik za montiranje         | 30 mm                  |
| Masa proizvoda                | 0,172 kg               |
| Oblik glave signalne jedinice | Osmougaona             |
| Informacija o poziciji glave  | 2 pozicije             |
| Tip kontakata i sastav        | Bez kontaktnog bloka   |
| Mehanička trajnost            | 500000 ciklusa         |
| Kompatibilnost proizvoda      | 9001KA2 strana 1 ili 2 |
| Prezentacija uređaja          | Osnovni element        |
| Boja kapica/glave ili sočiva  | Crna                   |
| Tip glave                     | Duga ručica            |
| Tip ručice                    | Bez povratka           |
| Veličina                      | 30 mm                  |
| Profil zupčanika              | 5                      |

### Okruženje

|                                     |                                                                       |
|-------------------------------------|-----------------------------------------------------------------------|
| Tretman zaštite                     | TC                                                                    |
| Temperatura okoline za skladištenje | -40...70 °C                                                           |
| Temperatura okoline za rad uređaja  | -25...70 °C                                                           |
| Kategorija prenapona                | Klasa II u skladu sa IEC 61140                                        |
| Ip stepen zaštite                   | IP66 u skladu sa IEC 60529                                            |
| Nema stepen zaštite                 | NEMA 1<br>NEMA 12<br>NEMA 13<br>NEMA 2<br>NEMA 3<br>NEMA 3R<br>NEMA 4 |

|                         |                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------|
| Standardi               | CSA C22.2 No 14<br>IEC 60947-5-4<br>JIS C 852<br>IEC 60947-5-1<br>IEC 60947-1<br>JIS C 4520<br>UL 508 |
| Sertifikacija proizvoda | NEMA[RETURN]UL 508                                                                                    |
| Otpornost na vibracije  | 7 gn (f= 2...500 Hz) u skladu sa IEC 60068-2-6                                                        |
| Otpornost na udare      | 50 gn u skladu sa IEC 60068-2-27                                                                      |

## Pakovanje

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 5,000 cm  |
| Package 1 Width              | 5,600 cm  |
| Package 1 Length             | 9,300 cm  |
| Package 1 Weight             | 126,000 g |
| Unit Type of Package 2       | S01       |
| Number of Units in Package 2 | 24        |
| Package 2 Height             | 15,000 cm |
| Package 2 Width              | 15,000 cm |
| Package 2 Length             | 40,000 cm |
| Package 2 Weight             | 3,198 kg  |


## Održivost ponude

|                              |                                                                                                                                                                             |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Status održive ponude        | Green Premium proizvod                                                                                                                                                      |
| Propis REACH                 |  <a href="#">REACH Deklaracija</a>                                                       |
| EU RoHS direktiva            | Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)                                                                                                |
| Bez žive                     | Da                                                                                                                                                                          |
| RoHS regulativa za Kinu      |  <a href="#">RoHS Deklaracija Za Kinu</a>                                                |
| Informacije o RoHS izuzecima |  <a href="#">Da</a>                                                                      |
| Izjava o zaštiti okoliša     |  <a href="#">Profil Ekološke Prihvatljivosti Proizvoda</a>                               |
| Profil cirkularnosti         | Nema potrebe za namenskim operacijama recikliranja                                                                                                                          |
| WEEE                         | Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke. |

## Ugovorna garancija

|           |           |
|-----------|-----------|
| Garancija | 18 months |
|-----------|-----------|


## Dimensions

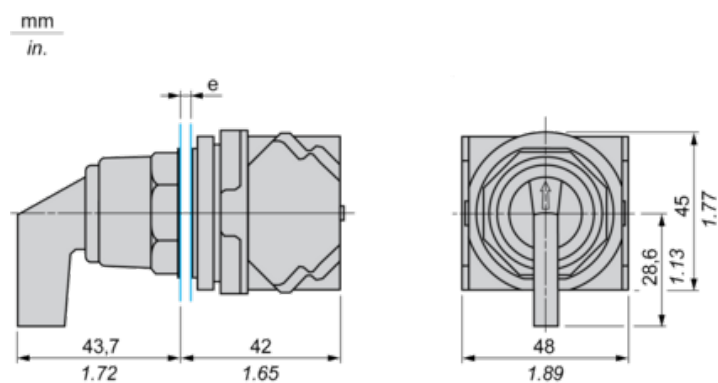

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

Contact Block Mounting Position


Top and Rear views

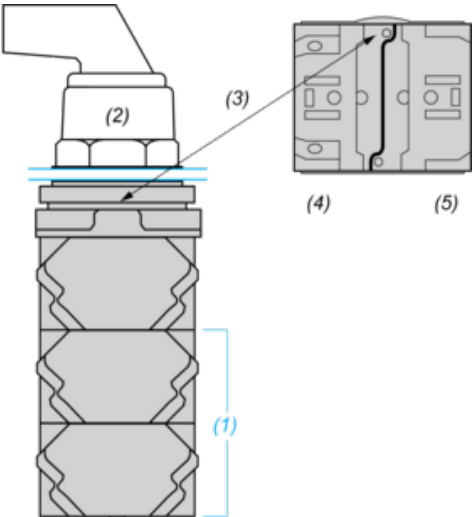

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)  
(2) Operator  
(3) Locating notch  
(4) Side 1  
(5) Side 2

Panel Cut-Out

Clearance

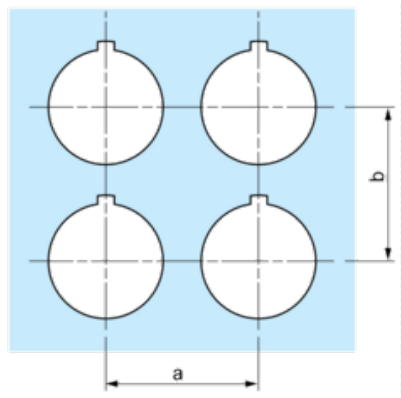

| Legend plate | a min. |      | b min. |      |
|--------------|--------|------|--------|------|
|              | mm     | in.  | mm     | in.  |
| 9001KN2••    | 57.2   | 2.25 | 44.5   | 1.75 |
| 9001KN3••    | 57.2   | 2.25 | 50.8   | 2.00 |

Individual Cut-outs Details

2 alternatives

mm  
in.

