


Tehničke karakteristike proizvoda

Karakteristike

ABS7SC2E

plug-in solid state relay - 10 mm - output - 5..48
V DC - 0.5 A

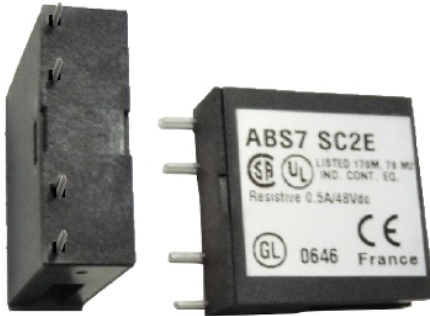

Osnovne informacije

Grupa proizvoda	Advantys Telefast ABE7
Tip proizvoda ili komponente	Utični tranzistorski relej
Tip releja	Izlazni relej
Minimum ordered quantity	Set od 4

Dopunske informacije

Vreme odziva	<= 0.1 ms iz stanja 0 u stanje 1 <= 0.6 ms iz stanja 1 u stanje 0
Širina reda	10 mm
Kompatibilnost proizvoda	ABE7P16T214 ABE7P16T215 ABE7P16T212 ABE7P16T210
Napon digitalnog ulaza	24 V DC
Napon digitalnog izlaza	5..48 V DC
Struja digitalnog izlaza	500 mA
Garantovano stanje 0	0.4 mA DC
Garantovano stanje 1	2.9 mA DC
Naponsko stanje 0 garantovano	3.8 V DC
Naponsko stanje 1 garantovano	18.6 V DC
Masa proizvoda	0,016 kg

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3,500 cm
Package 1 Width	4,400 cm
Package 1 Length	6,000 cm
Package 1 Weight	6,000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Height	3,500 cm
Package 2 Width	4,400 cm
Package 2 Length	6,000 cm
Package 2 Weight	29,000 g
Unit Type of Package 3	S02
Number of Units in Package 3	128
Package 3 Height	15,000 cm

Package 3 Width	30,000 cm
Package 3 Length	40,000 cm
Package 3 Weight	1,165 kg


Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	Da
Izjava o zaštiti okoliša	Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
Bez PVC	Da

Ugovorna garancija

Garancija	18 months
-----------	-----------

Internal Wiring Diagram



Temperature Derating Curves

