

Tehničke karakteristike proizvoda

Karakteristike

HMIDT752

flat screen, Harmony GTU, 15inch wide
display, 1366 x 768pixels FWXGA



Osnovne informacije

Grupa proizvoda	Harmony GTU
Tip proizvoda ili komponente	Ravan ekran
Tip priključka	Ekran osjetljiv na dodir
[Us] nazivni napon napajanja	12...24 V DC napajanje
Granice napona	10,8...28,8 V
Snaga potrošnje u w	17 W
Udarne struja	30 A

Dopunske informacije

Integrirani načini povezivanja	USB 2.0 tip A USB 2.0 tip mini B
Rezolucija ekrana osjetljivog na dodir	2048 x 2048
Rezolucija u pikselima	1366 x 768
Veličina displeja	15.6 inch
Razmera	4:3
Tip displeja	TFT LCD u boji
Rezolucija displeja	1366 x 768 pixels FWXGA
Boja displeja	16 miliona boja
Životni vek pozadinskog osvetljenja	50000 časova
Ekran osjetljiv na dodir	Multi-touch projected capacitive technology (PCT) 50000000 ciklusa
Dostupna funkcija	Senzor osvetljenja
Tip hlađenja	Prirodno strujanje vazduha
Tip instalacije	Instalacija u zatvorenom
Dimenzije izreza	396 (+ 1/- 0) x 277 (+ 1/- 0) mm
Širina	414 mm
Visina	295 mm
Dubina	69 mm
Masa proizvoda	5 kg

Okruženje

Ip stepen zaštite	Prednji panel: IP66 Prednji panel: IP67
Nema stepen zaštite	NEMA 4X prednji panel
Standardi	UL 508 ANSI/ISA 12-12-01 Klasa I odeljak 2 CSA C22.2 No 213 CSA C22.2 No 142 IEC 61132-2
Sertifikacije proizvoda	KC[RETURN]CE[RETURN]RCM[RETURN]CULus[RETURN]UKCA[RETURN]UKEX
Temperatura okoline za rad	0...55 °C u skladu sa IEC 61131-2
Temperatura okoline za skladištenje	-20...60 °C

Relativna vlažnost	10...90 % bez kondenzacije
Nadmorska visina za rad uređaja	2000 m
Otpornost na vibracije	3.5 mm konstanta amplituda (f = 5...9 Hz) u skladu sa IEC 61131-2 9.8 m/s² (f = 9...150 Hz) u skladu sa IEC 61131-2
Otpornost na udare	147 m/s² u skladu sa IEC 61131-2
Elektromagnetna kompatibilnost	Test otpornosti elektrostatičkog pražnjenja nivo 3 conforming to IEC 61000-4-2

Pakovanje


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	17,000 cm
Package 1 Width	42,000 cm
Package 1 Length	52,500 cm
Package 1 Weight	5,474 kg
Unit Type of Package 2	P12
Number of Units in Package 2	14
Package 2 Height	90,000 cm
Package 2 Width	80,000 cm
Package 2 Length	120,000 cm
Package 2 Weight	99,836 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	 Informacije O Kraju Radnog Veka
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.


External Dimensions

Display Unit with Box Module

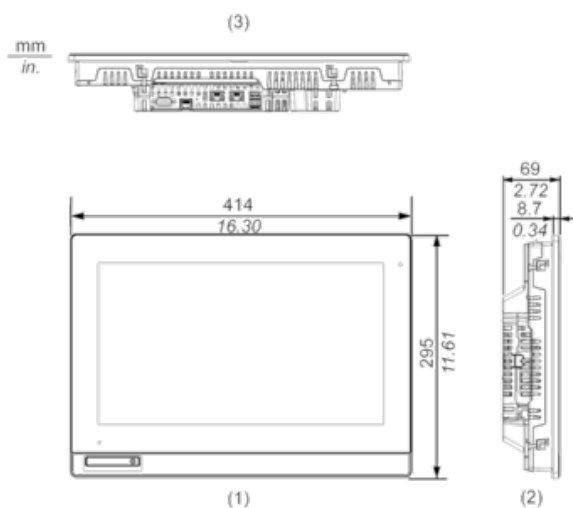

- (1) Front
- (2) Left
- (3) Bottom


Installation with Installation Fasteners and Dimensions with Cables

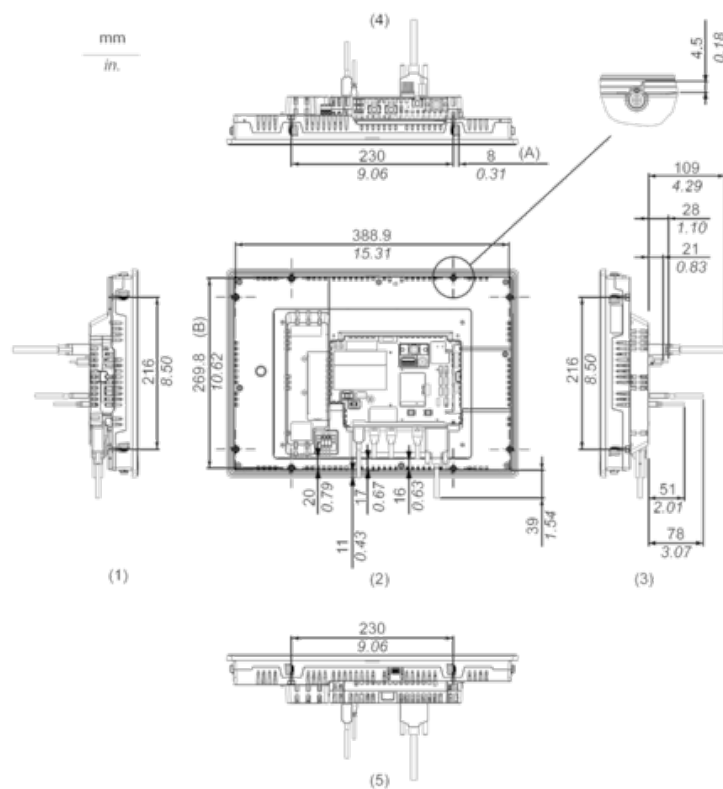

- (A) Rotation area of the fastener
- (B) Pitch of the center of installation fastener screws
- (1) Right
- (2) Front

- (3) Left
- (4) Bottom
- (5) Top

Panel Cut Dimensions

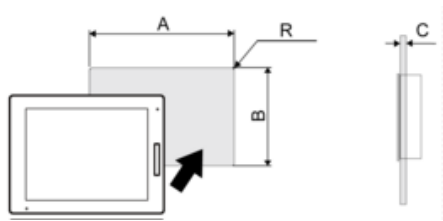

Dimensions in mm


A	B	C	R
396 (+1/-0)	277 (+1/-0)	1.6...5	3 max.

Dimensions in in.

A	B	C	R
15.59 (+0.04/-0)	10.91 (+0.04/-0)	0.06...0.2	0.12 max.

Installation Requirements

Mounting Angle



When installing this product in a slanted position with an incline more than 30°, the ambient temperature must not exceed 40 °C (104 °F). You may need to use forced air cooling (fan, A/C) to ensure the ambient operating temperature is 40 °C or less (104 °F or less).

Clearance

