

Tehničke karakteristike proizvoda

Karakteristike

HMIPSOH752D1801

multi touch screen, Harmony iPC, S panel
PC optimized, HDD, 15inch wide display, DC,
Windows 10



Osnovne informacije

Grupa proizvoda	Harmony iPC
Tip proizvoda ili komponente	Multi-touch ekran
Ime procesora	Intel Atom E3827 dual core at 1,75 GHz
Tip čipa	Intel Atom SoC
Broj senzora	1 Interni SATA HDD/SSD 1 CFAST
Veličina displeja	15.6 inch
Boja displeja	16777216 boja
Osvetljenost	300 cd/m²
Rezolucija u pikselima	4096 x 4096
Tip video kontrolera	Intel HD Graphics
Operativni sistem	Windows 10 IoT Enterprise 64 bitvišejezični
Paket softvera	EcoStruxure secure connect advisor godišnja pretplata rizik sigurnosti licenca nije uključena EcoStruxure Operator Terminal Expert run time HMI licenca nije uključena EcoStruxure Machine SCADA Expert run time HMI/SCADA samo sa podešenom ponudom EcoStruxure augmented operator advisor server pomoć operateru licenca nije uključena

Dopunske informacije

Broj tačaka	5
Tip priključka	Ekran osjetljiv na dodir
Tip memorije	4 GB RAM DDR3 interni
Oprema za skladištenje podataka	500 GB extension back side enterprise hard disk
Razmera	16:9
Tip displeja	LED TFT LCD u boji
Rezolucija displeja	1366 x 768 piksela WXGA
Životni vek pozadinskog osvetljenja	50000 časova
Vidni ugao horizontalni x vertikalni	150 x 140°
Operatorski panel osjetljiv na dodir	Projected capacitive technology (PCT)
Tip hlađenja	Pasivno Bez ventilatora
Watchdog tajmer	1...255 milisekundi
Broj slotova	1 mini PCI Express u punoj veličini
[us] nazivni napon	24 V DC +/- 20% 100...240 V AC with additional adaptor HMIYPSOMAC1
[in] nazivna struja	1,7 A
Mehanička robusnost	Tvrdoća protiv ogrebotina 7H
Lokalna signalizacija	Zujalica ZaON: LED (zelena) Zauređaj na čekanju: LED (narandžasta)
Dostupna funkcija	Rad sa vodom na ekranu

Širina	419,7 mm
Visina	269 mm
Dubina	86 mm
Dimenzije izreza	412.4 (+/- 0.7) x 261.7 (+/- 0.4)
Masa proizvoda	3,9 kg
Veličina displeja	15" wide multi-touch
Glavni tip	Optimised

Okruženje

Ip stepen zaštite	IP66 prednji panel:
Sertifikacija proizvoda	AS/NZS[RETURN]C-Tick[RETURN]EAC[RETURN]CE[RETURN]RCM[RETURN]CCC
Standardi	FCC part 15 class A CISPR 11 IEC 60950 CSA C22.2 No 60950 IEC 61000-6-4 UL 60950 IEC 61000-6-2
Direktive	2006/95/EC - niskonaponska direktiva 2004/108/EC - elektromagnetna kompatibilnost
Stepen zaprljanosti	2
Temperatura okoline za rad	0...55 °C SSD 0...55 °C Cfast kartica 0...45 °C HDD 0...45 °C Mini PCIe
Temperatura okoline za skladištenje	-20...60 °C
Relativna vlažnost	10...95 % bez kondenzacije
Nadmorska visina za rad uređaja	2000
Otpornost na vibracije	1 gn (f = 5...500 Hz)HDD 2 gn (f = 5...500 Hz)SSD 2 gn (f = 5...500 Hz)Cfast kartica

Pakovanje


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6,2 cm
Package 1 Width	26,9 cm
Package 1 Length	42,0 cm
Package 1 Weight	4,0 kg
Unit Type of Package 2	P12
Number of Units in Package 2	6
Package 2 Height	80 cm
Package 2 Width	105 cm
Package 2 Length	125 cm
Package 2 Weight	49 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACh	 REACh Deklaracija
REACh bez SVHC	Da
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda


Profil cirkularnosti	 Informacije O Kraju Radnog Veka
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Dimensions

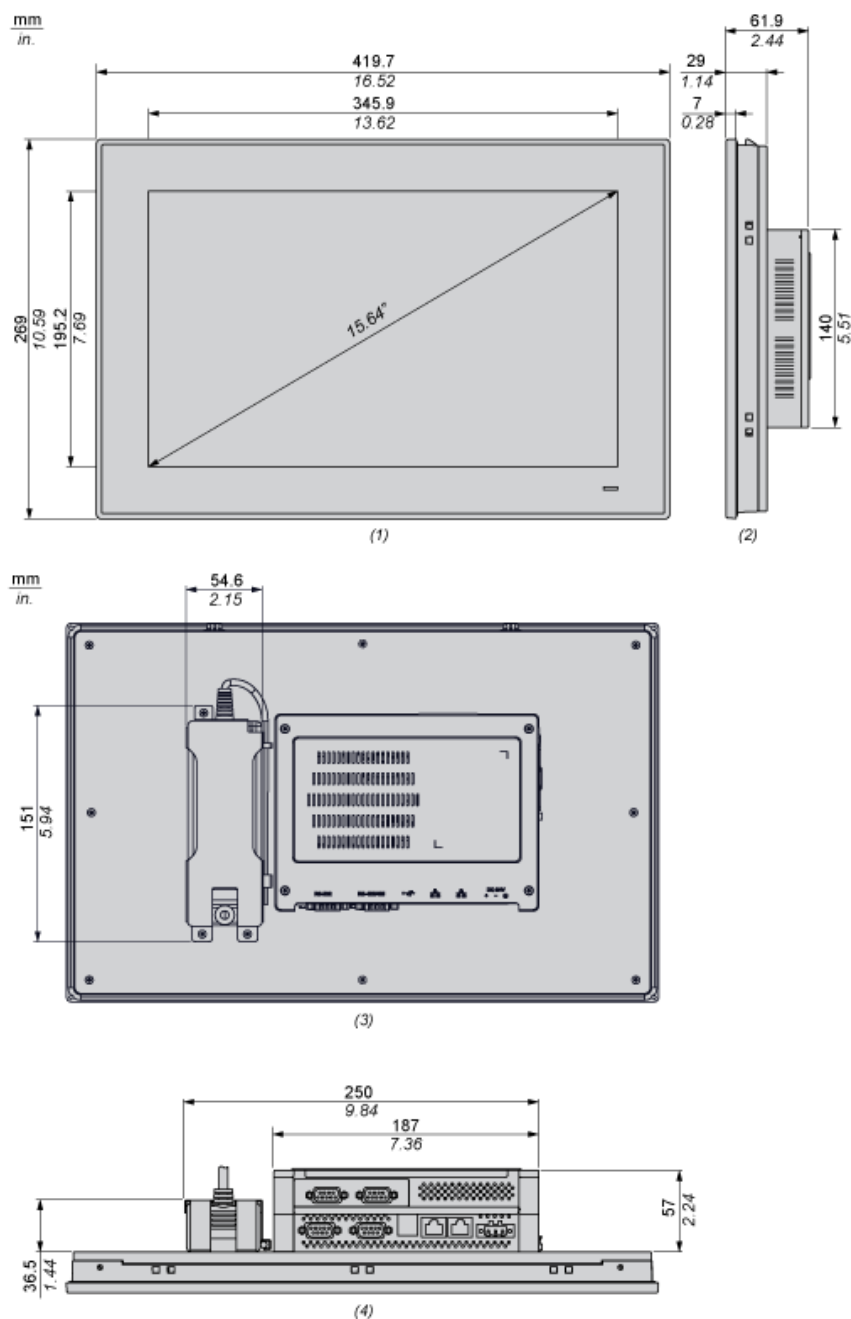

- (1) Front view
- (2) Right view
- (3) Back view
- (4) Bottom view

Spacing Requirements

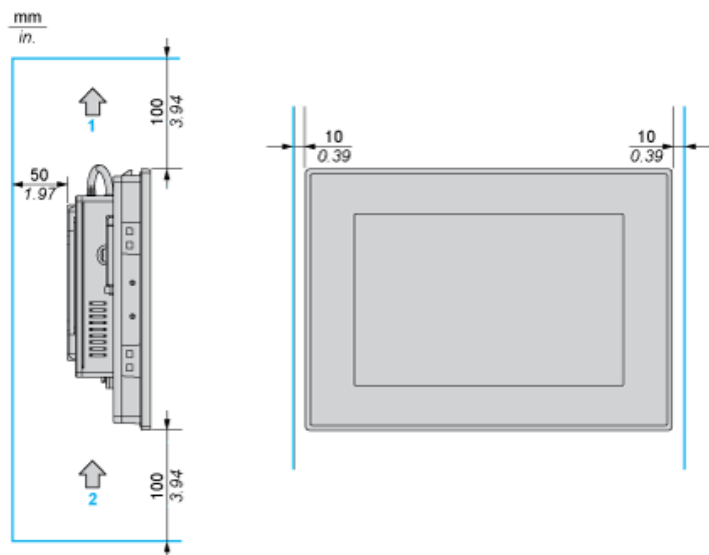


- 1 : Air out
- 2 : Air in

Mounting Orientation



Panel Cut Dimensions

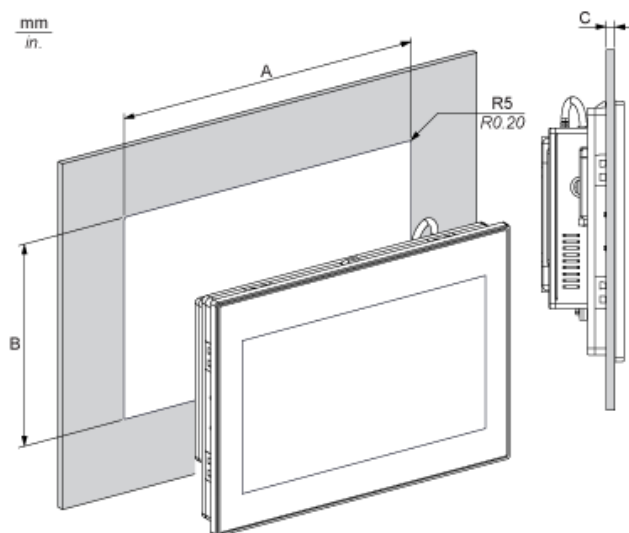

A		B		C		R	
mm	in.	mm	in.	mm	in.	mm	in.
412.4	16.24	261.7	10.30	2...6	0.08...0.23	5	0.20