


Tehničke karakteristike proizvoda

Karakteristike

LC1K1210E7

TeSys K kontaktor - 3P(3 NO) - AC-3 - ≤ 440
V 12 A - 48 V AC kalem

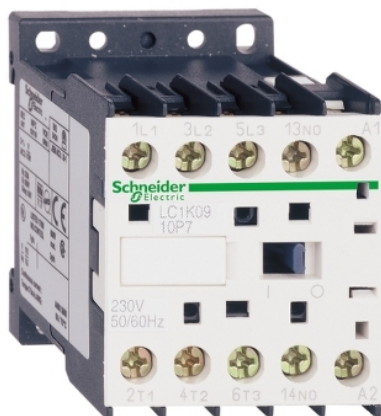

Osnovne informacije

Grupa proizvoda	TeSys
Tip proizvoda ili komponente	Kontaktori
Ime proizvoda	TeSys K
Kratko ime uređaja	LC1K
Primena uređaja	Upravljanje
Primena kontaktora	Rezistivno opterećenje Upravljanje motorom

Dopunske informacije

Kategorija upotrebe	AC-1 AC-4 AC-3
Broj polova	3P
Power pole contact composition	3 NO
[ue] nazivni napon	Power circuit: 690 V AC 50/60 Hz Signalling circuit: ≤ 690 V AC 50/60 Hz
[ie] nazivna struja	20 A (at ≤ 50 °C) at ≤ 440 V AC AC-1 for power circuit 12 A at ≤ 440 V AC AC-3 for power circuit 16 A (at ≤ 70 °C) at 690 V AC AC-1 for power circuit
Tip upravljačkog kola	AC at 50/60 Hz
Napon upravljačkog kola	48 V AC 50/60 Hz
Snaga motora kw	4 KW at 480 V AC 50/60 Hz AC-3 4 KW at 500...600 V AC 50/60 Hz AC-3 4 KW at 660...690 V AC 50/60 Hz AC-3 2.2 KW at 400 V AC 50/60 Hz AC-4 3 KW at 220...230 V AC 50/60 Hz AC-3 5.5 KW at 380...415 V AC 50/60 Hz AC-3 5.5 kW at 440 V AC 50/60 Hz AC-3
Sastav pomoćnog kontakta	1 NO
[uimp] nazivni podnosivi impulsni napon	8 kV
Kategorija prenapona	III
[ith] dozvoljena termička struja u vazduhu	20 A (at 50 °C) for power circuit 10 A (at 50 °C) for signalling circuit
Irms nazivna moć uključenja	110 A AC for signalling circuit conforming to IEC 60947 144 A AC for power circuit conforming to NF C 63-110 144 A AC for power circuit conforming to IEC 60947
Nazivna prekidna moć	110 A at 440 V conforming to IEC 60947 80 A at 500 V conforming to IEC 60947 70 A at 660...690 V conforming to IEC 60947

Informacije navedene u ovoj dokumentaciji predstavljaju opšti opis odnosno tehničke karakteristike performansi proizvoda. Dokumentacija nije namenjena da bude zamena za niti se može koristiti za određivanje prikladnosti i pouzdanosti proizvoda za specifičnu primenu. Dužnost je korisnika odnosno integratora da izvrši primerenu i sveobuhvatnu analizu rizika, procenu i proveru proizvoda u pogledu odgovarajuće specifične primene ili načina korišćenja. Ni Schneider Electric Industries SAS ni njegova povezana ili zavisna društva neće snositi odgovornost za zloupotrebu ovenavedenih informacija.

[icw] kratkotrajna podnosiva struja kratkog spoja	115 A 50 °C - 1 s for power circuit 105 A 50 °C - 5 s for power circuit 100 A 50 °C - 10 s for power circuit 75 A 50 °C - 30 s for power circuit 55 A 50 °C - 1 min for power circuit 50 A 50 °C - 3 min for power circuit 80 A - 1 s for signalling circuit 90 A - 500 ms for signalling circuit 110 A - 100 ms for signalling circuit 25 A 50 °C - >= 15 min for power circuit
Pripadajući osigurač	25 A gG at <= 440 V for power circuit 25 A aM for power circuit 10 A gG for signalling circuit conforming to IEC 60947 10 A gG for signalling circuit conforming to VDE 0660
Prosečna impedansa	3 mOhm - lth 20 A 50 Hz for power circuit
[ui] nazivni napon izolacije	Power circuit: 600 V conforming to UL 508 Power circuit: 690 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-4-1 Signalling circuit: 690 V conforming to IEC 60947-5-1 Signalling circuit: 600 V conforming to UL 508 Power circuit: 600 V conforming to CSA C22.2 No 14 Signalling circuit: 600 V conforming to CSA C22.2 No 14
Otpornost izolacije	> 10 MOhm for signalling circuit
Udarna snaga u va	30 VA (at 20 °C)
Snaga držanja u va	4.5 VA (at 20 °C)
Disipacija toplote	1.3 W
Ograničenje napona upravljačkog kola	Operational: 0.8...1.15 U _c (at <50 °C) Drop-out: 0.2...0.75 U _c (at <50 °C)
Povezivanje - priključci	Screw clamp terminals 1 cable(s) 1.5...4 mm ² solid Screw clamp terminals 1 cable(s) 0.75...4 mm ² flexible without cable end Screw clamp terminals 1 cable(s) 0.34...2.5 mm ² flexible with cable end Screw clamp terminals 2 cable(s) 1.5...4 mm ² solid Screw clamp terminals 2 cable(s) 0.75...4 mm ² flexible without cable end Screw clamp terminals 2 cable(s) 0.34...1.5 mm ² flexible with cable end
Maksimalni radni ciklus	3600 cyc/h
Tip pomoćnog kontakta	Type instantaneous 1 NO
Frekvencija signalnog kola	<= 400 Hz
Minimalna struja preklapanja	5 mA for signalling circuit
Minimalni napon preklapanja	17 V for signalling circuit
Nosači za montažu	Ploča Šina
Moment pritezanja	1.3 N.M - on screw clamp terminals - with screwdriver Philips No 2 1.3 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm
Vreme uključenja/isključenja	10...20 ms coil de-energisation and NO opening 10...20 ms coil energisation and NO closing
Nivo sigurnosne pouzdanosti	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Udaljenost nepreklapanja	0,5 mm
Mehanička trajnost	10 miliona ciklusa
Električna trajnost	0.3 Mcycles 20 A AC-1 at U _e <= 440 V 1.3 Mcycles 12 A AC-3 at U _e <= 440 V
Mehanička robusnost	Shocks contactor closed, on X axis: 10 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor closed, on Y axis: 15 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor closed, on Z axis: 15 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor opened, on X axis: 6 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor opened, on Y axis: 10 Gn for 11 ms conforming to IEC 60068-2-27 Shocks contactor opened, on Z axis: 10 Gn for 11 ms conforming to IEC 60068-2-27 Vibrations contactor closed: 4 Gn, 5...300 Hz conforming to IEC 60068-2-6 Vibrations contactor opened: 2 Gn, 5...300 Hz conforming to IEC 60068-2-6
Visina	58 mm
Širina	45 mm

Dubina	57 mm
Masa proizvoda	0,18 kg

Okruženje

Standardi	BS 5424 IEC 60947 NF C 63-110 VDE 0660
Sertifikacija proizvoda	CSA UL
Ip stepen zaštite	IP2x conforming to VDE 0106
Zaštitni tretman	TC u skladu sa IEC 60068 TC conforming to DIN 50016
Temperatura okoline za skladištenje	-50...80 °C
Nadmorska visina za rad uređaja	2000 m without derating
Otpornost na plamen	V1 conforming to UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102

Pakovanje

Tip jedinice pakovanja 1	PCE
Broj jedinica u pakovanju 1	1
Pakovanje 1 težina	179 g
Pakovanje 1 visina	4,8 cm
Pakovanje 1 širina	6,2 cm
Pakovanje 1 dužina	6,5 cm
Pakovanje 2 težina	9,362 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACh	 REACh Deklaracija
REACh bez SVHC	Da
EU RoHS direktiva	Usaglašeno  EU RoHS Deklaracija
Bez toksičnih teških metala	Da
Bez žive	Da
Informacije o RoHS izuzecima	 Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	 Informacije O Kraju Radnog Veka
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Ugovorna garancija

Garancija	18 meseci
-----------	-----------