


Tehničke karakteristike proizvoda

Karakteristike

LV847382

MN podnaponski okidač - 100/130 V AC/DC - za MTZ fiksni

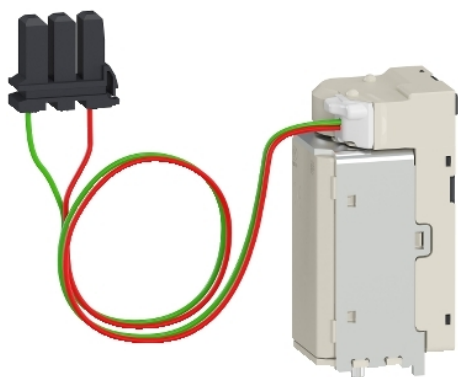

Osnovne informacije

Grupa proizvoda	Masterpact
Kratko ime uređaja	MN
Tip proizvoda ili komponente	Podnaponski okidač
Primena uređaja	Sigurnost
Kompatibilnost grupe proizvoda	Masterpact MTZ1 circuit breaker Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker
Tip naponskog okidača	Trenutno

Dopunske informacije

Tip upravljanja	Standardni
[Un] voltage power supply	100...130 V AC 50/60 Hz 100...130 V DC
Prag napona okidanja	0.35...0.7 Un opening 0.85 Un closing
Holding power consumption	4.5 W
Circuit breaker mounting mode	Fiksno
Maximum response time	45 ms pri otvaranju za Masterpact MTZ1 95 ms pri otvaranju za Masterpact MTZ2 95 ms pri otvaranju za Masterpact MTZ3

Pakovanje

Pakovanje 1 težina	0,164 kg
Pakovanje 1 visina	0,300 dm
Pakovanje 1 širina	0,800 dm
Pakovanje 1 dužina	0,600 dm

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACh	 REACh Deklaracija
EU RoHS direktiva	Usaglašeno  EU RoHS Deklaracija
Bez žive	Da
Informacije o RoHS izuzecima	 Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	 Informacije O Kraju Radnog Veka