


## Tehničke karakteristike proizvoda

### Karakteristike

## VW3A7702

kočioni otpornik - IP 20 - 60 Ω - 100 W

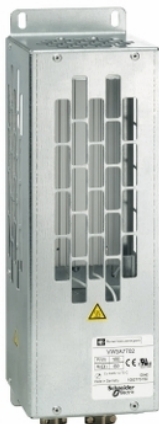

### Osnovne informacije

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Grupa proizvoda                | Altivar                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Kompatibilnost grupe proizvoda | Altivar 31C<br>Altivar 312 Solar<br>Altivar 32<br>Altivar 12<br>Altivar 71<br>Altivar Easy 310<br>Altivar 61<br>Altivar 312                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Kompatibilnost proizvoda       | ATV31CU22M2<br>ATV12HU22M2<br>ATV12HU22M3<br>ATV12PU22M3<br>ATV312HU22M2<br>ATV312HU22M3<br>ATV312HU30M3<br>ATV312HU55N4<br>ATV312HU55S6<br>ATV312HU75N4<br>ATV312HU75S6<br>ATV31CU55N4<br>ATV31CU75N4<br>ATV32HU22M2<br>ATV32HU55N4<br>ATV32HU75N4<br>ATV61HD11Y<br>ATV61HD15Y<br>ATV61HU15M3<br>ATV61HU22M3<br>ATV61HU22S6X<br>ATV61HU30S6X<br>ATV61HU40S6X<br>ATV61HU55N4<br>ATV61HU55S6X<br>ATV61HU75N4<br>ATV61HU75S6X<br>ATV61WD11N4<br>ATV61WD11N4C<br>ATV61WU75N4<br>ATV61WU75N4C<br>ATV71HD11Y<br>ATV71HU15M3<br>ATV71HU15S6X<br>ATV71HU22M3<br>ATV71HU22S6X<br>ATV71HU30S6X<br>ATV71HU40S6X<br>ATV71HU55N4<br>ATV71HU55S6X<br>ATV71HU75N4<br>ATV71HU75S6X<br>ATV71HU75Y<br>ATV71PU55N4Z<br>ATV71PU75N4Z<br>ATV71WU55N4<br>ATV71WU75N4<br>Frekventni regulator ATV310 pri 5,5 kW<br>Frekventni regulator ATV310 pri 7,5 kW |
| Prosečna dostupna snaga        | 100 W at 50 °C<br>115 W pri 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Omska vrednost                 | 60 Ω                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## Dopunske informacije

|                                                  |                                                                                                                                                                                     |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Električna veza                                  | Priključak, kapacitet priključka: ≤ 1.5 mm <sup>2</sup> / AWG 16 za temperaturni prekidač<br>Priključak, kapacitet priključka: ≤ 4 mm <sup>2</sup> / AWG 28 za frekventni regulator |
| Tip zaštite                                      | Thermal protection via drive or temperature control switch at 120 °C                                                                                                                |
| [ue] nazivni radni napon                         | 24 V DC pri 0,1 A<br>250 V AC pri 1 A                                                                                                                                               |
| Temperature controlled switch contact resistance | 60 μΩ                                                                                                                                                                               |
| Masa proizvoda                                   | 2,4 kg                                                                                                                                                                              |

## Okruženje

|                                     |             |
|-------------------------------------|-------------|
| Temperatura okoline za rad uređaja  | 0...50 °C   |
| Temperatura okoline za skladištenje | -25...70 °C |
| Ip stepen zaštite                   | IP20        |

## Pakovanje

|                             |          |
|-----------------------------|----------|
| Tip jedinice pakovanja 1    | PCE      |
| Broj jedinica u pakovanju 1 | 1        |
| Pakovanje 1 težina          | 2,687 kg |
| Pakovanje 1 visina          | 21,5 cm  |
| Pakovanje 1 širina          | 50 cm    |
| Pakovanje 1 dužina          | 20,5 cm  |
| Pakovanje 2 težina          | 28,73 kg |

## Održivost ponude

|                              |                                                                                                                                                                                                      |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Propis REACH                 |  <a href="#">REACH Deklaracija</a>                                                                                |
| REACH bez SVHC               | Da                                                                                                                                                                                                   |
| EU RoHS direktiva            | Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)  <a href="#">EU RoHS deklaracija</a> |
| Bez toksičnih teških metala  | Da                                                                                                                                                                                                   |
| Bez žive                     | Da                                                                                                                                                                                                   |
| Informacije o RoHS izuzecima |  <a href="#">Da</a>                                                                                               |
| RoHS regulativa za Kinu      |  <a href="#">RoHS Deklaracija Za Kinu</a>                                                                         |

## Ugovorna garancija

|           |           |
|-----------|-----------|
| Garancija | 18 months |
|-----------|-----------|