


Tehničke karakteristike proizvoda

Karakteristike

VW3A7730

braking resistor - 100 ohms - 0.1 kW - IP20

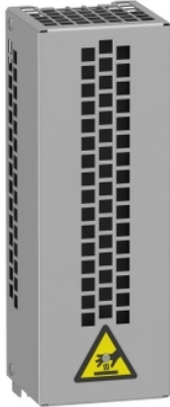

Osnovne informacije

Kompatibilnost grupe proizvoda	Altivar Process ATV900
	Altivar Machine ATV340
	Altivar Machine ATV320
	Easy Altivar 310
	Easy Altivar 310L
Tip proizvoda ili komponente	Kočioni otpornik
Omska vrednost	100 Ω

Kompatibilnost proizvoda	Frekventni regulator ATV930 montaža na zid 0,75 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 1,5 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 2,2 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 3 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 4 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 0,75 kW 200...240 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 0,75 kW 380...480 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 1,5 kW 380...480 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 2,2 kW 380...480 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 3 kW 380...480 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 4 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 0,75 kW 380...480 V srednji ciklus Frekventni regulator ATV930 montaža na zid 0,75 kW 200...240 V srednji ciklus Frekventni regulator ATV950 montaža na zid 0,75 kW 380...480 V srednji ciklus Frekventni regulator ATV950 montaža na zid 1,5 kW 380...480 V srednji ciklus Frekventni regulator ATV340 0,75 kW 380...480 V svetlosni ciklus Frekventni regulator ATV340 1,5 kW 380...480 V svetlosni ciklus Frekventni regulator ATV340 2,2 kW 380...480 V svetlosni ciklus Frekventni regulator ATV340 3 kW 380...480 V svetlosni ciklus Frekventni regulator ATV340 0,75 kW 380...480 V srednji ciklus Frekventni regulator ATV320 0,18 kW 200...240 V Frekventni regulator ATV320 0,37 kW 200...240 V Frekventni regulator ATV320 0,37 kW 380...480 V Frekventni regulator ATV320 0,55 kW 380...480 V Frekventni regulator ATV320 0,75 kW 380...480 V Frekventni regulator ATV320 1,1 kW 380...480 V Frekventni regulator ATV320 1,5 kW 380...480 V Frekventni regulator ATV320 2,2 kW 380...480 V Frekventni regulator ATV320 3 kW 380...480 V Frekventni regulator ATV310 1,5 kW Frekventni regulator ATV310 2,2 kW Frekventni regulator ATV310 3 kW Frekventni regulator ATV310 4 kW Frekventni regulator ATV930 2,2 kW 500...690 V svetlosni ciklus Frekventni regulator ATV930 3 kW 500...690 V svetlosni ciklus Frekventni regulator ATV930 4 kW 500...690 V svetlosni ciklus Frekventni regulator ATV930 5,5 kW 500...690 V svetlosni ciklus Frekventni regulator ATV930 3 hp 600 V svetlosni ciklus Frekventni regulator ATV930 5 hp 600 V svetlosni ciklus Frekventni regulator ATV930 7,5 hp 600 V svetlosni ciklus Frekventni regulator ATV930 2,2 kW 500...690 V srednji ciklus Frekventni regulator ATV930 3 kW 500...690 V srednji ciklus Frekventni regulator ATV930 3 hp 600 V srednji ciklus Frekventni regulator ATV320 0,75 kW 525...600 V Frekventni regulator ATV320 1,5 kW 525...600 V Frekventni regulator ATV320 2,2 kW 525...600 V Frekventni regulator ATV320 4 kW 525...600 V Frekventni regulator ATV310L 0,75 kW Frekventni regulator ATV310L 1,5 kW Frekventni regulator ATV310L 2,2 kW Frekventni regulator ATV310L 3,0 kW Frekventni regulator ATV310L 4,0 kW Frekventni regulator ATV310L 5,5 kW
Radni ciklus	Svetlosni ciklus (zahtevne aplikacije) <0,8 sekundi braking with 150 % braking torque for a 40 sekundi cycle Svetlosni ciklus (normalan rad) <0,8 sekundi braking with 1.2 braking torque for a 40 sekundi cycle Srednji ciklus (normalan rad) <4 sekundi braking with 1.35 braking torque for a 40 sekundi cycle Srednji ciklus (zahtevne aplikacije) <4 sekundi braking with 1.65 braking torque for a 40 sekundi cycle
Prosečna dostupna snaga	0,1 kW pri 50 °C
Električna veza	Priključak, kapacitet priključka: ≤ 10 mm ² / AWG 8 za frekventni regulator
Tip zaštite	Termička zaštita preko regulatora
Širina	105 mm
Visina	295 mm
Dubina	100 mm
Masa proizvoda	1,5 kg

Okruženje

Ip stepen zaštite	IP20
Temperatura okoline za skladištenje	-25...70 °C
Temperatura okoline za rad uređaja	0...50 °C

Pakovanje


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	31,2 cm
Package 1 Width	16,7 cm
Package 1 Length	12 cm
Package 1 Weight	1,7 kg
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	10,966 kg

Održivost ponude

Propis REACh	REACh Deklaracija
REACh bez SVHC	Da
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS) EU RoHS deklaracija
Bez toksičnih teških metala	Da
Bez žive	Da
RoHS regulativa za Kinu	RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	Da

Dimensions

Right Side and Front View

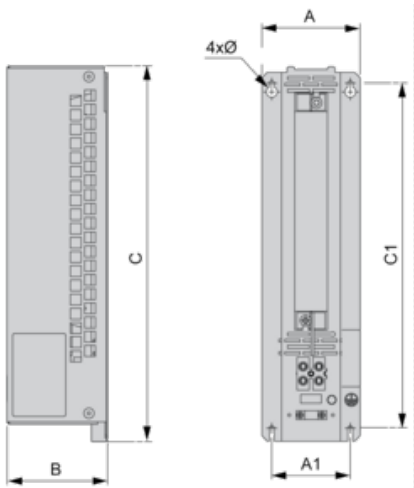

Dimensions in mm

A	B	C	A1	C1	Ø
105	100	295	72	266	4.5


Dimensions in in.

A	B	C	A1	C1	Ø
4.13	3.94	11.61	2.83	10.47	0.18

Mounting and Clearance




(1) Braking resistor

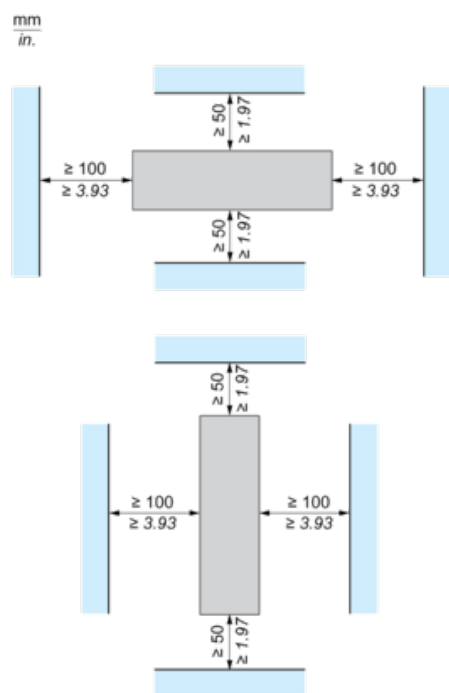

Recommended Schema

1 Braking Resistor




A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

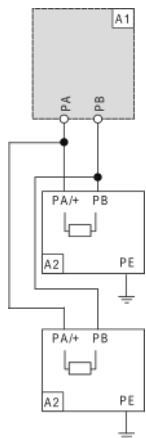

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC