

Tehničke karakteristike proizvoda

Karakteristike

VW3A7733

braking resistor - 16 ohms - 1.1 kW - IP20



Osnovne informacije

Kompatibilnost grupe proizvoda	Altivar Machine ATV320 Altivar Process ATV900 Altivar Machine ATV340
Tip proizvoda ili komponente	Kočioni otpornik
Omska vrednost	16 Ω
[ue] nazivni radni napon	24 V DC 250 V AC

Dopunske informacije

Kompatibilnost proizvoda	Frekventni regulator ATV930 montaža na zid 18,5 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 22 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 30 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 5,5 kW 200...240 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 7,5 kW 200...240 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 18,5 kW 380...480 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 22 kW 380...480 V svetlosni ciklus Frekventni regulator ATV950 montaža na zid 30 kW 380...480 V svetlosni ciklus Frekventni regulator ATV930 montaža na zid 5,5 kW 200...240 V srednji ciklus Frekventni regulator ATV930 montaža na zid 7,5 kW 200...240 V srednji ciklus Frekventni regulator ATV340 15 kW 380...480 V svetlosni ciklus Frekventni regulator ATV340 18 kW 380...480 V svetlosni ciklus Frekventni regulator ATV340 22 kW 380...480 V svetlosni ciklus Frekventni regulator ATV320 4 kW 200...240 V Frekventni regulator ATV320 5,5 kW 200...240 V Frekventni regulator ATV320 15 kW 380...480 V Frekventni regulator ATV930 22 kW 500...690 V svetlosni ciklus Frekventni regulator ATV930 30 kW 500...690 V svetlosni ciklus Frekventni regulator ATV930 37 kW 500...690 V svetlosni ciklus Frekventni regulator ATV930 30 hp 600 V svetlosni ciklus Frekventni regulator ATV930 40 hp 600 V svetlosni ciklus Frekventni regulator ATV930 50 hp 600 V svetlosni ciklus
Radni ciklus	Svetlosni ciklus (zahtevne aplikacije) <0,8 sekundi braking with 150 % braking torque for a 40 sekundi cycle Svetlosni ciklus (normalan rad) <0,8 sekundi braking with 1.2 braking torque for a 40 sekundi cycle Srednji ciklus (normalan rad) <4 sekundi braking with 1.35 braking torque for a 40 sekundi cycle Srednji ciklus (zahtevne aplikacije) <4 sekundi braking with 1.65 braking torque for a 40 sekundi cycle
Prosečna dostupna snaga	1,1 kW pri 50 °C
Električna veza	Priključak, kapacitet priključka: $\leq 10 \text{ mm}^2$ / AWG 8 za frekventni regulator Priključak, kapacitet priključka: $\leq 2.5 \text{ mm}^2$ / AWG 12 za temperaturni prekidač
Tip zaštite	Termička zaštita frekventnim regulatorom ili temperaturnim prekidačem pri 120 °C
Širina	190 mm
Visina	570 mm
Dubina	180 mm
Masa proizvoda	3,8 kg

Okruženje

Ip stepen zaštite	IP20
Temperatura okoline za skladištenje	-25...70 °C
Temperatura okoline za rad uređaja	0...50 °C

Pakovanje


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	25,2 cm
Package 1 Width	20,6 cm
Package 1 Length	58,2 cm
Package 1 Weight	4,434 kg
Unit Type of Package 2	P06
Number of Units in Package 2	8
Package 2 Height	77,0 cm
Package 2 Width	60,0 cm
Package 2 Length	80,0 cm
Package 2 Weight	44,164 kg

Održivost ponude

Propis REACH	 REACH Deklaracija
REACH bez SVHC	Da
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)  EU RoHS deklaracija
Bez toksičnih teških metala	Da
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da

Dimensions

Right Side and Front View

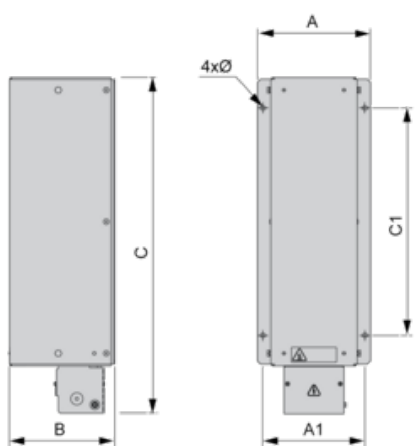

Dimensions in mm

A	B	C	A1	C1	Ø
190	180	570	170	380	6.6 x 9

Dimensions in in.


A	B	C	A1	C1	Ø
7.48	7.09	22.44	6.69	14.96	0.26 x 0.35

Mounting and Clearance




(1) Braking resistor

mm
in.

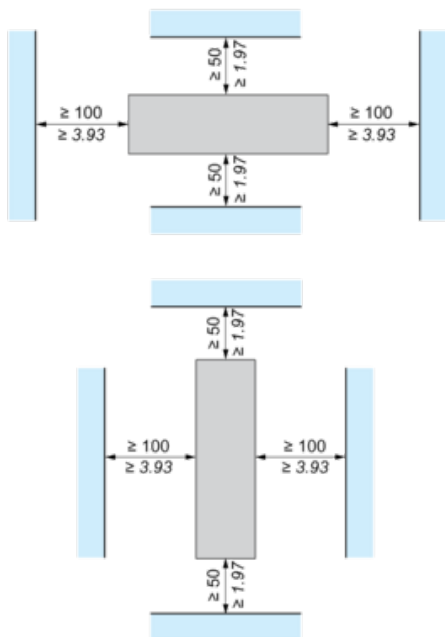

Recommended Schema

1 Braking Resistor




A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

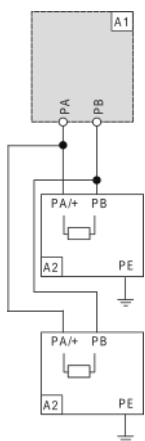

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC