

Tehničke karakteristike proizvoda

Karakteristike

XACB0815

prazna viseća upravljačka stanica XAC-B - 8
otvora + 1 u bazi kućišta



Osnovne informacije

| | |
|------------------------------|---------------------|
| Grupa proizvoda | Harmony XAC |
| Tip proizvoda ili komponente | Upravljačka stanica |
| Kratko ime uređaja | XACB |

Dopunske informacije

| | |
|-------------------------------------|--|
| Upotreba upravljačke stanice | Dvostruko izolovana |
| Materijal kućišta | Staklom ojačan poliester |
| Tip električnog kola | Upravljačko kolo Kolo napajanja |
| Tip ormara | Prazan ormar |
| Broj otvora | 8 izreza |
| Boja upravljačke stanice | Žuta |
| Kablovski uvod | Gumena kablovska spojnica sa stepenastim uvodom 22...35 mm |
| Rukohvat | Bez |
| Razmak vertikalnih otvora | 40 mm |
| Standardi | EN/IEC 60947-5-1 CSA C22.2 No 14 |
| Sertifikacija proizvoda | CSA tip 4 |
| Tretman zaštite | TH |
| Temperatura okoline za rad uređaja | -25...70 °C |
| Temperatura okoline za skladištenje | -40...70 °C |
| Otpornost na vibracije | 15 gn (f= 10...500 Hz) u skladu sa IEC 60068-2-6 |
| Otpornost na udare | 100 gn u skladu sa IEC 60068-2-27 |
| Kategorija prenapona | Klasa II u skladu sa IEC 61140 |
| Ip stepen zaštite | IP65 u skladu sa IEC 60529 |
| Ik stepen zaštite | IK08 conforming to EN 50102 |
| Mehanička trajnost | 1000000 ciklusa |
| Masa proizvoda | 1,53 kg |

Pakovanje

| | |
|------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 9,5 cm |
| Package 1 Width | 10,5 cm |
| Package 1 Length | 70,5 cm |
| Package 1 Weight | 1,67 kg |

Održivost ponude


| | |
|------------------------------|--|
| Propis REACH | REACH Deklaracija |
| REACH bez SVHC | Da |
| EU RoHS direktiva | Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS) EU RoHS deklaracija |
| Bez toksičnih teških metala | Da |
| Bez žive | Da |
| RoHS regulativa za Kinu | RoHS Deklaracija Za Kinu |
| Informacije o RoHS izuzecima | Da |

Ugovorna garancija

| | |
|-----------|-----------|
| Garancija | 18 months |
|-----------|-----------|

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

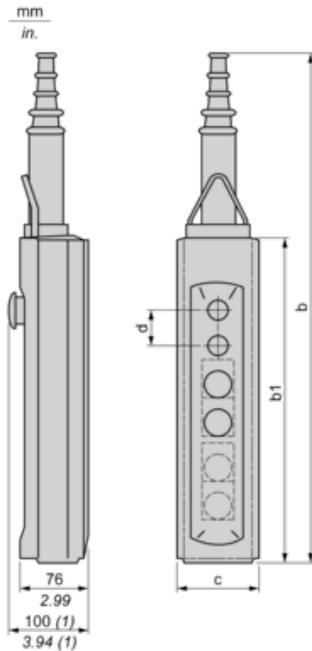

(1) With mushroom head operator


Dimensions in mm

| Number of cut-outs | 2 | 4 | 6 | 8 | 12 |
|--------------------|-----|-----|-----|-----|-----|
| b | 409 | 499 | 589 | 679 | 679 |
| b1 | 220 | 310 | 400 | 490 | 490 |
| c | 98 | 98 | 98 | 98 | 98 |
| d | 40 | 40 | 40 | 40 | 30 |

Dimensions in in.

| Number of cut-outs | 2 | 4 | 6 | 8 | 12 |
|--------------------|-------|-------|-------|-------|-------|
| b | 16.10 | 19.64 | 23.19 | 26.73 | 26.73 |
| b1 | 8.66 | 12.20 | 15.75 | 19.29 | 19.29 |
| c | 3.86 | 3.86 | 3.86 | 3.86 | 3.86 |
| d | 1.57 | 1.57 | 1.57 | 1.57 | 1.18 |


Protective cable sleeves



(1) Internal \emptyset


Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately

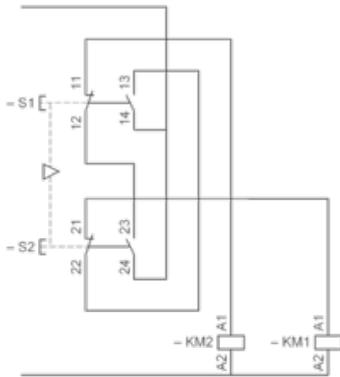

Control of 2-Speed Reversing Motor


With XESD1281 contact block, to be ordered separately

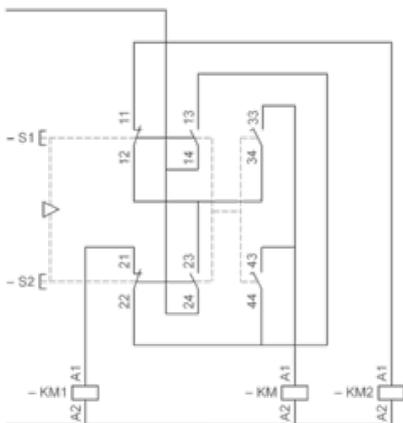


KM High speed contactor

Control of Single-Speed Reversing Motor 2-Phase Switching

With XESD1191 contact block, to be ordered separately

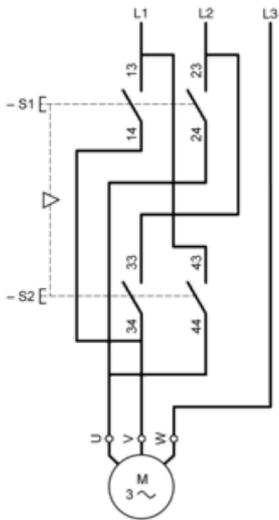


Combined with 3-pole isolating block XACS399 or XACS3991, shown in the unoperated position (pendant station "supplied"), fitted with key release trigger action latching Emergency stop operator.

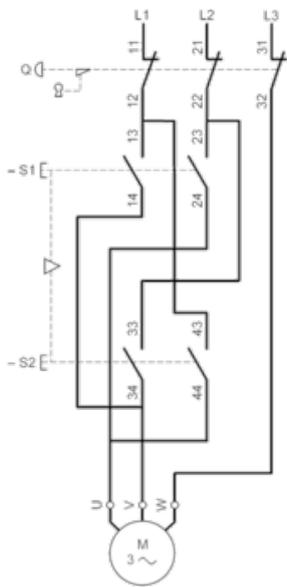


Control of 2-Speed Reversing Motor 2-Phase Switching

With XESD1291 contact block, to be ordered separately

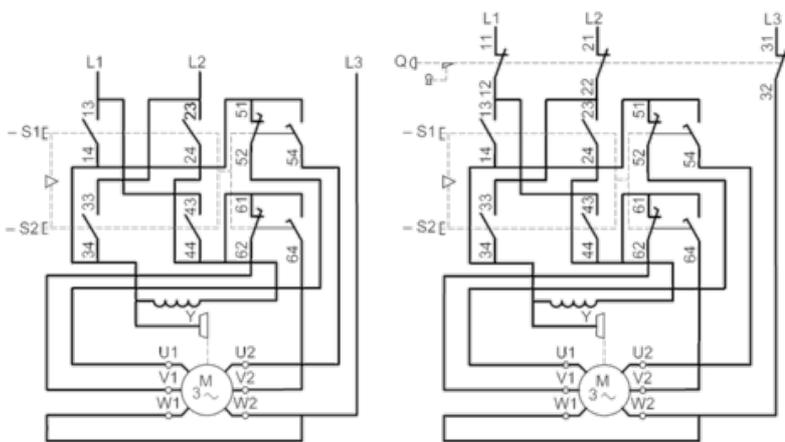

Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2201 contact block, to be ordered separately

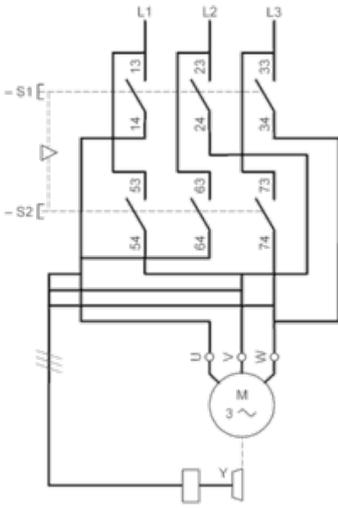

Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2241 contact block, to be ordered separately

