


## Tehničke karakteristike proizvoda

### Karakteristike

## XALG03

Empty control station, Harmony XALG, mineral reinforced polyamide, black, 3 cut outs, for severe environments

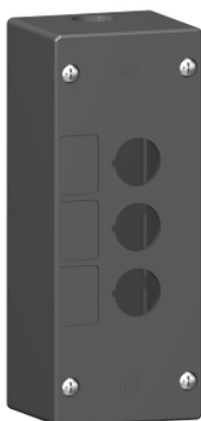

### Osnovne informacije

|                                |                                                                           |
|--------------------------------|---------------------------------------------------------------------------|
| Grupa proizvoda                | Harmony XALG                                                              |
| Tip proizvoda ili komponente   | Prazna upravljačka stanica                                                |
| Kratko ime uređaja             | XALG                                                                      |
| Namena proizvoda               | Za XB5 Ø 22 mm upravljačko signalne elemente                              |
| Karakteristike životne sredine | Severe ambience                                                           |
| Boja osnova kućišta            | Crna (RAL 9005)                                                           |
| Boja poklopca                  | Crna (RAL 9005)                                                           |
| Materijal                      | Mineral reinforced polyamide                                              |
| Kablovski uvod                 | 2 knock-outs for ISO M20 cable entry                                      |
| Ip stepen zaštite              | IP66 u skladu sa IEC 60529<br>IP67 u skladu sa IEC 60529<br>IP69<br>IP69K |

### Dopunske informacije

|                                             |                                      |
|---------------------------------------------|--------------------------------------|
| Način spajanja                              | Za sastavljanje kod korisnika        |
| Broj otvora                                 | 3 izreza 30 mm                       |
| Cad ukupna širina                           | 180 mm                               |
| Cad ukupna visina                           | 72 mm                                |
| Cad ukupna dubina                           | 65 mm                                |
| Masa proizvoda                              | 0,333 kg                             |
| Otpornost na uređaj za pranje pod pritiskom | 10 mPa pri 80 °C, razdaljina : 0.2 m |

### Okruženje

|                                        |                                   |
|----------------------------------------|-----------------------------------|
| Tretman zaštite                        | TH<br>TC                          |
| Temperatura okoline za skladištenje    | -40...70 °C                       |
| Temperatura okoline za rad uređaja     | -25...70 °C                       |
| Klasa zaštite protiv električnog udara | Klasa II u skladu sa EN/IEC 61140 |
| Ik stepen zaštite                      | IK05 conforming to EN 50102       |

Informacije navedene u ovoj dokumentaciji predstavljaju opšti opis odnosno tehničke karakteristike performansi proizvoda. Dokumentacija nije namenjena da bude zamena za niti se može koristiti za određivanje prikladnosti i pouzdanosti proizvoda za specifičnu krajnju primenu. Dužnost je korisnika odnosno integratora da izvrši primerenu i sveobuhvatnu analizu rizika, procenu i proveru proizvoda u pogledu odgovarajuće specifične primene ili načina korišćenja. Ni Schneider Electric Industries SAS ni njegova povezana ili zavisna društva neće snositi odgovornost za zloupotrebu ovde navedenih informacija.

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Otpornost na hemijske faktore | <p>Good resistance to lactic acid pri 10 °C</p> <p>Good resistant to detergent pri 60 °C</p> <p>Not resistant to formic acid (10 %) pri 50 °C</p> <p>Not resistant to lactic acid pri 90 °C</p> <p>Good resistance to ammonia</p> <p>Good resistance to benzene</p> <p>Good resistance to butter</p> <p>Good resistance to citric acid (10 %)</p> <p>Good resistance to cutting compounds</p> <p>Good resistance to ethane</p> <p>Good resistance to ethanol</p> <p>Good resistance to ethylene</p> <p>Good resistance to fatty acids</p> <p>Good resistance to fatty alcohols</p> <p>Good resistance to milk</p> <p>Good resistance to motor oils and greases</p> <p>Good resistance to oils (vegetable, mineral)</p> <p>Good resistance to petroleum</p> <p>Dobra otpornost na aceton</p> <p>Good resistant to uric acid (20 %)</p> <p>Limited resistance to acetic acid (10 %)</p> <p>Limited resistance to boric acid</p> <p>Not resistant to hydrogen peroxide (30 %)</p> <p>Not resistant to nitric acid (2 %)</p> |
| Standardi                     | <p>EN/IEC 60947-1</p> <p>EN/IEC 60947-5-1</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## Pakovanje

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Number of Units in Package 1 | 1       |
| Package 1 Height             | 8,0 cm  |
| Package 1 Width              | 10,0 cm |
| Package 1 Length             | 18,7 cm |
| Package 1 Weight             | 321,0 g |
| Unit Type of Package 2       | S03     |
| Number of Units in Package 2 | 16      |
| Package 2 Height             | 30,0 cm |
| Package 2 Width              | 30,0 cm |
| Package 2 Length             | 40,0 cm |
| Package 2 Weight             | 5,64 kg |


## Održivost ponude

|                              |                                                                                                                                                                                                      |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Status održive ponude        | Green Premium proizvod                                                                                                                                                                               |
| Propis REACh                 |  <a href="#">REACh Deklaracija</a>                                                                                |
| REACh bez SVHC               | Da                                                                                                                                                                                                   |
| EU RoHS direktiva            | Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)  <a href="#">EU RoHS deklaracija</a> |
| Bez toksičnih teških metala  | Da                                                                                                                                                                                                   |
| Bez žive                     | Da                                                                                                                                                                                                   |
| RoHS regulativa za Kinu      |  <a href="#">RoHS Deklaracija Za Kinu</a>                                                                         |
| Informacije o RoHS izuzecima |  <a href="#">Da</a>                                                                                               |
| Izjava o zaštiti okoliša     |  <a href="#">Profil Ekološke Prihvatljivosti Proizvoda</a>                                                        |
| Profil cirkularnosti         |  <a href="#">Informacije O Kraju Radnog Veka</a>                                                                  |

## Ugovorna garancija

|           |           |
|-----------|-----------|
| Garancija | 18 months |
|-----------|-----------|

## Dimensions

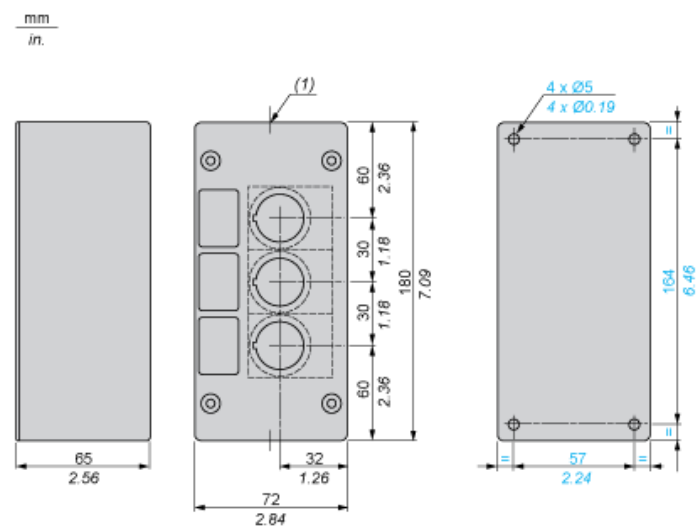

(1) 2 ISO 20 cable entries.