

Lista sa podacima o proizvodima

Specifikacije



Signalna lampica, Harmony XB4 -
ATEX D, zelena, integral LED,
24...254V

XB4BVB3GEX

Cena* bez PDV-a: 12.119,00 RSD

Osnovne informacije

Grupa proizvoda	Harmony XB4
Tip proizvoda ili komponente	Kompletna lampica
Kratko ime uređaja	XB4
Materijal podnožja	Hromirani metal
Materijal montažnog rama	Zamak
Prečnik za montiranje	22 mm
Prodaja po nedeljivim količinama	1
Zona prašine	Zona 21 - 22
Zona gasa	Zone 1 - 2
Dodatne informacije o glavi uređaja	Sa glatkim sočivima

Dopunske informacije

Širina	46,2 mm
Visina	30 mm
Dubina	69 mm
Masa proizvoda	0,083 kg
Montaža uređaja	Otvor za montažu - prečnik: 22,5 mm +/- 0.2 mm u skladu sa IEC 60947-1
Centar za fiksiranje	>= 30 x 40 mm (nosač panela) 1...6 mm
Dubina za ugradnju	58 mm
Označavanje	Ex tb IIIC Db II 2 GD Ex eb mb IIC Gb
Oblik glave signalne jedinice	Okrugla
Boja kapica/glave ili sočiva	Zelena
Povezivanje - priključci	Vijčani priključni blokovi, 2 x 1.5 mm² sa kablovskim završetkom u skladu sa IEC 60947-1 Vijčani priključni blokovi, 1 x 2.5 mm² bez kablovskog završetka u skladu sa IEC 60947-1
Moment pritezanja	0,8...1,2 N.m u skladu sa IEC 60947-1
Tip signalizacije	Trajna
Svetlosni izvor	Integrirani LED
Boja svetlosnog izvora	Zelena
[us] nazivni napon napajanja	24...254 V AC/DC

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

Odricanje odgovornosti: Ova dokumentacija nije namenjena kao zamena i ne treba je koristiti za utvrđivanje podobnosti ili pouzdanosti ovih proizvoda za određene namene

Servisni vek	100000 sati
--------------	-------------

Okruženje

Tretman zaštite	TH
Temperatura okoline za skladištenje	-40...70 °C
Temperatura okoline za rad uređaja	-20...75 °C
Kategorija prenapona	I conforming to IEC 60536
Ip stepen zaštite	IP65 u skladu sa IEC 60529
Standardi	IEC 60079-0:2009 IEC 60079-7:2009 EN/IEC 60079-18:2009 IEC 60079-31:2009 UL 60079-0 UL 60079-18 UL 60079-31 ANSI/ISA 12.12.01 CSA C22.2 No 213
Sertifikacija proizvoda	INERIS 04ATEX9003U

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3,0 cm
Package 1 Width	4,5 cm
Package 1 Length	7,5 cm
Package 1 Weight	104,0 g

Environmental Data

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

Objašnjeni Environmental Data >

Kako procenjujemo održivost proizvoda >

Ekološki otisak	
Emisija ugljenika (kg CO2 eq.)	15
Izjava o zaštiti okoline	Profil ekološke prihvatljivosti proizvoda

Use Better

Materijali i pakovanje	
Pakovanje bez plastike	No
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
SCIP broj	3d14fd98-3859-4733-a5ee-a3016769973c
Uredba REACH	REACH deklaracija

Use Again


Prepakovanje i prefabrikovanje	
Profil cirkularnosti	Informacije o kraju radnog veka
Povraćaj	No
WEEE	 Proizvod se mora odložiti na tržišta Evropske unije nakon posebnog sakupljanja otpada i nikada ne završiti u kanti za smeće.

Lista sa podacima o
proizvodima

XB4BVBM3GEX

Dimensions Drawings

Dimensions

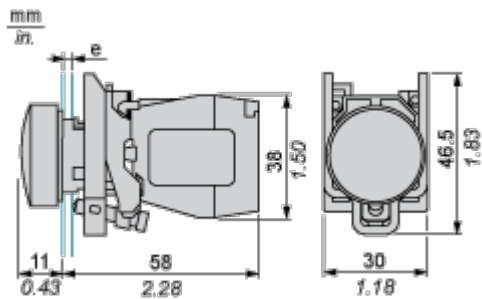


e : support thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals

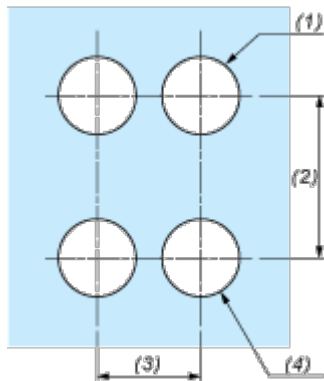

- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $^{+0.4}_0$ / 0.88 in. $^{+0.016}_0$)

Technical Illustration

Dimensions

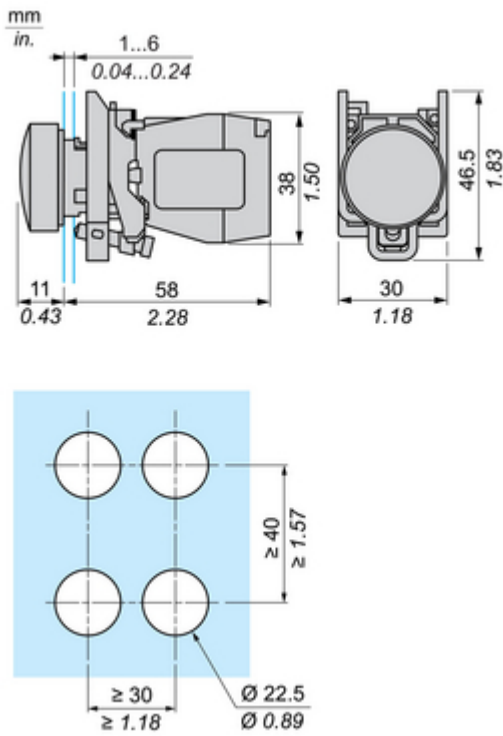

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB4



Quick and easy assembly and disassembly



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Excellent mechanical connection with operator head



Large set of accessories to customize your panels



Robustness to withstand harsh environments



Offer Marketing Illustration

Product benefits / Features




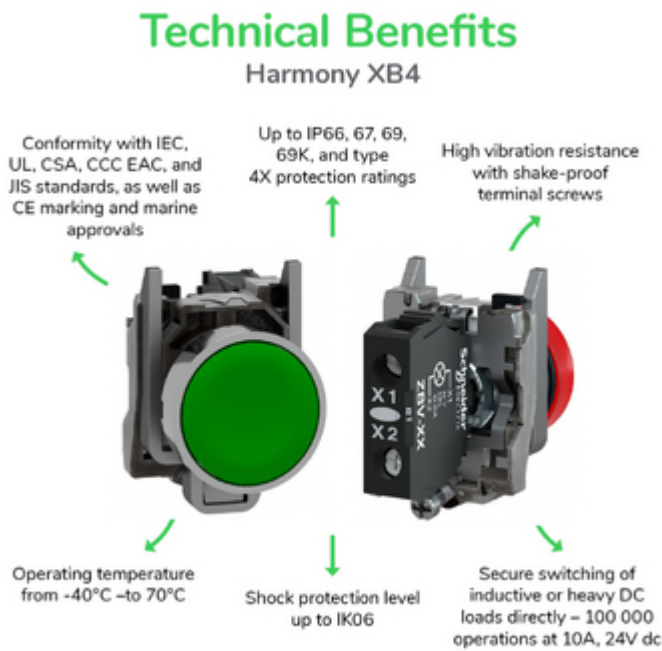


Image of product / Alternate images

Alternative

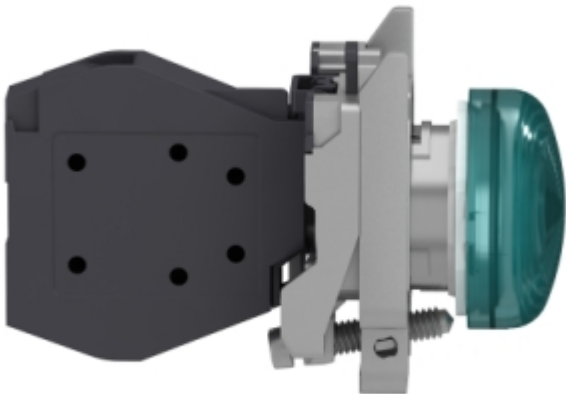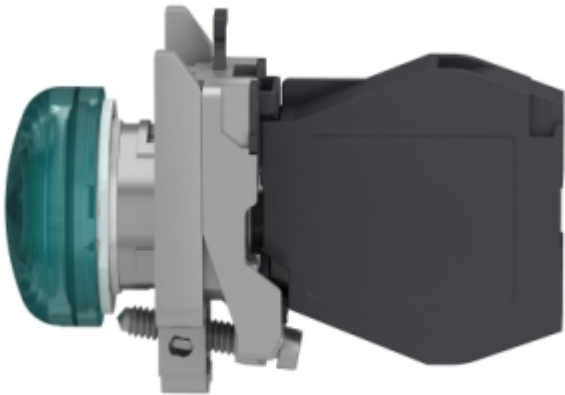

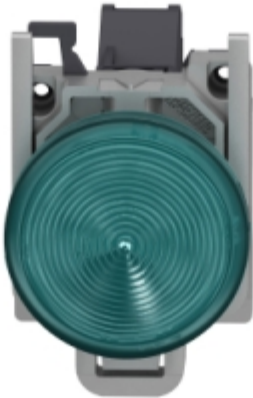

Lista sa podacima o
proizvodima

XB4BVBM3GEX

Image of product in real life situation

