

Tehničke karakteristike proizvoda

Karakteristike

XB4RFB01

set SPS - XB4 - Ø22 mm metalni - neprogramabilni prijemnik - 24 V DC



Osnovne informacije

Grupa proizvoda	Harmony XB4R
Tip proizvoda ili komponente	Bežični i bezbaterijski paket
Kratko ime uređaja	XB4R
Materijal glave	Metal
Frequency	2405 MHz za predajnik 2405 MHz za prijemnik
Emission class	5M00G7W
Vrsta antene	Omnidirekciona

Dopunske informacije

Način upravljanja	Bežični taster bez baterije Ø 22 mm sastavljeno na montažnom ramu
Tip prijemnika	Neprogramabilni prijemnik (1 relej)
[us] nazivni napon napajanja	24 V DC
Sastav seta	1 montažni ramovi 1 22 mm 1 glava tastera 22 mm 1 predajnik 1 prijemnik 1 set kapica
Protokol komunikacionog porta	Zigbee u skladu sa IEEE 802.15.4
Maksimalna snaga potrošnje u w	1 mW
Broj kanala	1
Tehnika modulacije	O-QPSK
Propusni opseg	5 MHz
Pojačanje antene	0 dBi
Izolacija	Ne
Kompatibilnost	XB4R
[us] nazivni napon	24 V

Okruženje

Sertifikacija proizvoda	CCC[RETURN]C-Tick[RETURN]GOST[RETURN]CSA[RETURN]UL
Označavanje	CE
Standardi	UL 508 EN/IEC 60947-1 CSA C22.2 No 14 EN/IEC 60947-5-1
Radio sporazum	ARIB T66 RSS ICASA SRRC FCC ANATEL

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9,300 cm
Package 1 Width	10,500 cm
Package 1 Length	11,000 cm
Package 1 Weight	235,000 g
Unit Type of Package 2	S03
Number of Units in Package 2	16
Package 2 Height	30,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	4,000 kg


Održivost ponude

Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da
Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Ugovorna garancija


Garancija	18 months
-----------	-----------

Non-Programmable Receiver

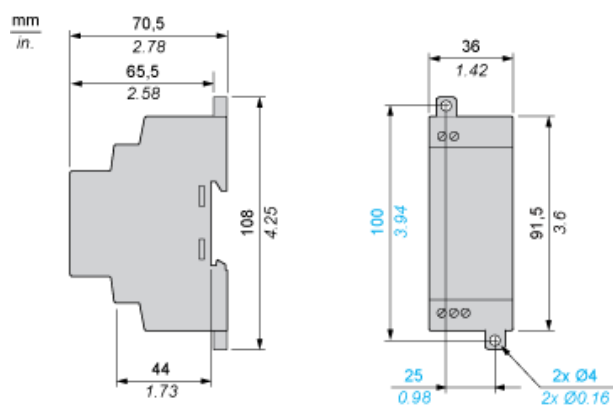


Wireless and Batteryless Pushbutton - Transmitter

With Metal Pushbutton without Cap

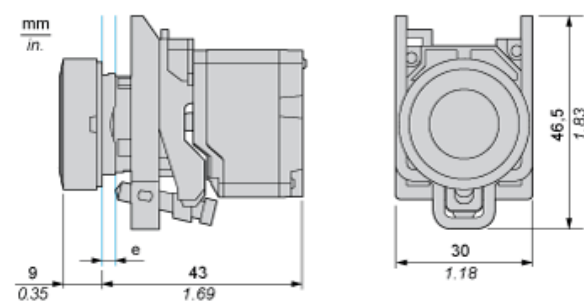


e: panel thickness 1 to 6 mm / 0.039 to 0.24 in.

Receiver Clearance

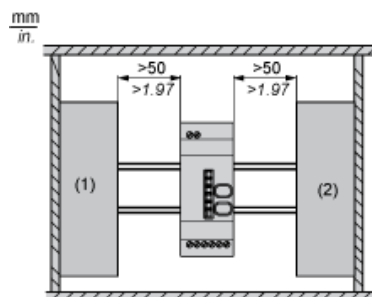


- (1) Drive
- (2) Power Supply or PLC

Receiver Mounting

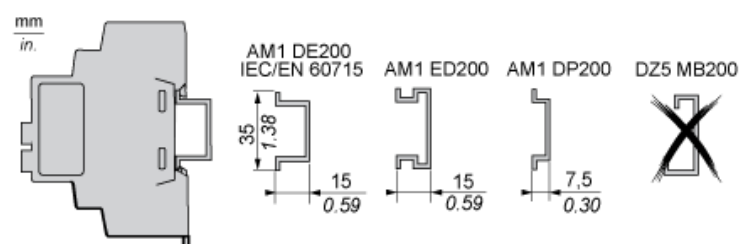

Non-Programmable Receiver

Wiring Diagram

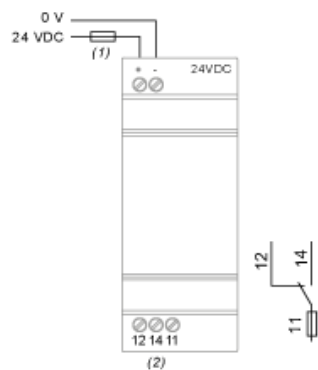

- (1) 125 mA fast-blow fuse
(2) $I_{max} = 3 \text{ A}$