

Tehničke karakteristike proizvoda

Karakteristike

XVBC2B4D

Indicator bank, Harmony XVB, illuminated unit, plastic, red, 70mm, steady, light diffuser, 24V AC/DC



Osnovne informacije

Grupa proizvoda	Harmony XVB Universal
Tip proizvoda ili komponente	Svetleća kolona
Tip baze svetleće kolone ili semafora	Illuminated unit with light diffuser
Tip signalizacije	Trajna
Prečnik za montiranje	70 mm
Ime komponente	XVBC
Materijal	Polikarbonat
Svetlosni izvor	Integrirani LED, crvena
Tip sijalice	Zaštićena LED lampica
[us] nazivni napon	24 V AC/DC

Dopunske informacije

Način spajanja	Za sastavljanje kod korisnika, do 5 jedinica
Povezivanje - priključci	Vijčani priključni blokovi, $\leq 1 \times 1.5 \text{ mm}^2$ sa kablovskim završetkom
[ui] nazivni napon izolacije	250 V u skladu sa IEC 60947-1
Nazivno ograničenje napona	0.85...1.1 Un u skladu sa IEC 60947-5-1
Potrošnja struje	$< 47 \text{ mA AC/DC}$
[uimp] nazivni podnosivi impulsni napon	4 kV u skladu sa IEC 60947-1
Cad ukupna širina	70 mm
Cad ukupna visina	63 mm
Cad ukupna dubina	70 mm
Masa proizvoda	0,15 kg

Okruženje

Stepen zaprljanosti	2
Sertifikacija proizvoda	CCC[RETURN]EAC[RETURN]CSA C22-2 No 14[RETURN]UL 508
Standardi	EN/IEC 60947-5-1
Tretman zaštite	TC
Temperatura okoline za skladištenje	$-40 \dots 70 \text{ }^{\circ}\text{C}$
Temperatura okoline za rad	$-25 \dots 50 \text{ }^{\circ}\text{C}$
Klasa zaštite protiv električnog udara	Klasa I na cevnom nosaču u skladu sa IEC 61140 Klasa II na bazi u skladu sa IEC 61140
Ip stepen zaštite	IP65 na bazi za fiksiranje XVBZ0. u skladu sa IEC 60529 IP66 na bazi u skladu sa IEC 60529
Nema stepen zaštite	Type 4X u skladu sa UL (u zatvorenom)

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9,0 cm
Package 1 Width	10,0 cm
Package 1 Length	9,0 cm
Package 1 Weight	151,0 g
Unit Type of Package 2	S03
Number of Units in Package 2	36
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	6,149 kg
Unit Type of Package 3	P06
Number of Units in Package 3	288
Package 3 Height	75 cm
Package 3 Width	40 cm
Package 3 Length	80 cm
Package 3 Weight	68,488 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	Nema potrebe za namenskim operacijama recikliranja
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.


Ugovorna garancija

Garancija	18 months
-----------	-----------

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

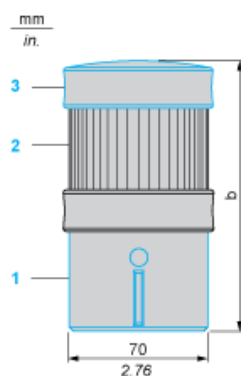


- (1) Base unit XVBC21, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) Cover (supplied with XVBC21 base unit)

Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

Indicator Bank with “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

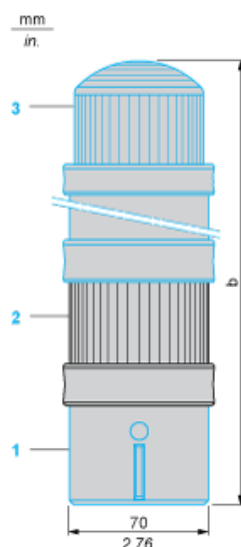

- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) “Flash” unit, to be ordered separately

Number of illuminated or audible signalling units other than "flash" tube	b in mm	b in in.
1	295	11.61
2	358	14.09
3	421	16.57
4	484	19.06