

## Tehničke karakteristike proizvoda

### Karakteristike

## XVBC2B7D

Indicator bank, Harmony XVB Universal,  
70mm, illuminated unit, with light diffuser,  
steady, clear, IP65, 24V



### Osnovne informacije

|                                       |                                      |
|---------------------------------------|--------------------------------------|
| Grupa proizvoda                       | Harmony XVB Universal                |
| Tip proizvoda ili komponente          | Svetleća kolona                      |
| Tip baze svetleće kolone ili semafora | Illuminated unit with light diffuser |
| Tip signalizacije                     | Trajna                               |
| Prečnik za montiranje                 | 70 mm                                |
| Ime komponente                        | XVBC                                 |
| Materijal                             | Polikarbonat                         |
| Svetlosni izvor                       | Integrirani LED, prozirna            |
| Tip sijalice                          | Zaštićena LED lampica                |
| [us] nazivni napon                    | 24 V AC/DC                           |

### Dopunske informacije

|                                         |                                                                                       |
|-----------------------------------------|---------------------------------------------------------------------------------------|
| Način spajanja                          | Za sastavljanje kod korisnika, do 5 jedinica                                          |
| Povezivanje - priključci                | Vijčani priključni blokovi, $\leq 1 \times 1.5 \text{ mm}^2$ sa kablovskim završetkom |
| [ui] nazivni napon izolacije            | 250 V u skladu sa IEC 60947-1                                                         |
| Nazivno ograničenje napona              | 0.85...1.1 Un u skladu sa IEC 60947-5-1                                               |
| Potrošnja struje                        | $< 47 \text{ mA AC/DC}$                                                               |
| [uimp] nazivni podnosivi impulsni napon | 4 kV u skladu sa IEC 60947-1                                                          |
| Cad ukupna širina                       | 70 mm                                                                                 |
| Cad ukupna visina                       | 63 mm                                                                                 |
| Cad ukupna dubina                       | 70 mm                                                                                 |
| Masa proizvoda                          | 0,15 kg                                                                               |

### Okruženje

|                                        |                                                                                               |
|----------------------------------------|-----------------------------------------------------------------------------------------------|
| Stepen zaprljanosti                    | 2                                                                                             |
| Sertifikacija proizvoda                | CCC[RETURN]EAC[RETURN]CSA C22-2 No 14[RETURN]UL 508                                           |
| Standardi                              | IEC 60947-5-1                                                                                 |
| Tretman zaštite                        | TC                                                                                            |
| Temperatura okoline za skladištenje    | -40...70 °C                                                                                   |
| Temperatura okoline za rad             | -25...50 °C                                                                                   |
| Klasa zaštite protiv električnog udara | Klasa I na cevnom nosaču u skladu sa IEC 61140<br>Klasa II na bazi u skladu sa IEC 61140      |
| Ip stepen zaštite                      | IP65 na bazi za fiksiranje XVBZ0. u skladu sa IEC 60529<br>IP66 na bazi u skladu sa IEC 60529 |
| Nema stepen zaštite                    | Type 4X u skladu sa UL (u zatvorenom)                                                         |

## Pakovanje

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 8 cm      |
| Package 1 Width              | 9,5 cm    |
| Package 1 Length             | 8 cm      |
| Package 1 Weight             | 153 g     |
| Unit Type of Package 2       | S03       |
| Number of Units in Package 2 | 36        |
| Package 2 Height             | 30 cm     |
| Package 2 Width              | 30 cm     |
| Package 2 Length             | 40 cm     |
| Package 2 Weight             | 6,221 kg  |
| Unit Type of Package 3       | P06       |
| Number of Units in Package 3 | 288       |
| Package 3 Height             | 77 cm     |
| Package 3 Width              | 80 cm     |
| Package 3 Length             | 60 cm     |
| Package 3 Weight             | 53,948 kg |

## Održivost ponude

|                              |                                                                                                                                                                             |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Status održive ponude        | Green Premium proizvod                                                                                                                                                      |
| Propis REACH                 |  <a href="#">REACH Deklaracija</a>                                                         |
| EU RoHS direktiva            | Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)                                                                                                |
| Bez žive                     | Da                                                                                                                                                                          |
| RoHS regulativa za Kinu      |  <a href="#">RoHS Deklaracija Za Kinu</a>                                                |
| Informacije o RoHS izuzecima |  <a href="#">Da</a>                                                                      |
| Izjava o zaštiti okoliša     |  <a href="#">Profil Ekološke Prihvatljivosti Proizvoda</a>                               |
| Profil cirkularnosti         | Nema potrebe za namenskim operacijama recikliranja                                                                                                                          |
| WEEE                         | Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke. |


## Ugovorna garancija

|           |           |
|-----------|-----------|
| Garancija | 18 months |
|-----------|-----------|

## Indicator Bank without “Flash” Discharge Tube Unit

### Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

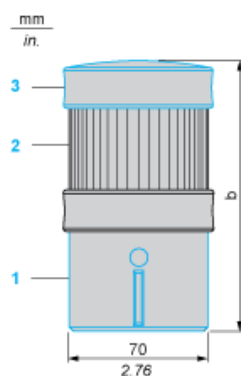


- (1) Base unit XVBC21, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) Cover (supplied with XVBC21 base unit)

| Number of illuminated or audible signalling units (no “flash”) | b in mm | b in in. |
|----------------------------------------------------------------|---------|----------|
| 1                                                              | 138     | 5.43     |
| 2                                                              | 201     | 7.91     |
| 3                                                              | 264     | 10.39    |
| 4                                                              | 327     | 12.87    |
| 5                                                              | 390     | 15.35    |

## Indicator Bank with “Flash” Discharge Tube Unit

### Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

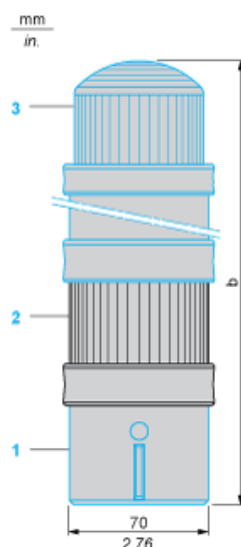

- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) “Flash” unit, to be ordered separately

| Number of illuminated or audible signalling units other than "flash" tube | b in mm | b in in. |
|---------------------------------------------------------------------------|---------|----------|
| 1                                                                         | 295     | 11.61    |
| 2                                                                         | 358     | 14.09    |
| 3                                                                         | 421     | 16.57    |
| 4                                                                         | 484     | 19.06    |