

Tehničke karakteristike proizvoda

Karakteristike

ZBRA2

External antenna for harmony Hub ZBRN1 and ZBRN2, Harmony XB5R, 2m cable, 1 radio frequency connector



Osnovne informacije

Grupa proizvoda	Harmony XB5R
Tip proizvoda ili komponente	Bežični i bezbaterijski opseg
Kratko ime uređaja	ZBRA
Namena proizvoda	Wireless access point
Boja osnova kućišta	Crna (RAL 9011)

Dopunske informacije

Protokol komunikacionog porta	Zigbee zelena energija pri 2,4 GHz u skladu sa IEEE 802.15.4
Sastav seta	Antenna with cable 2 m
Impedansa ulaza	50 Ω
Tip priključka	MCX female
Pojačanje antene	3 dBi pri 83...100 Hz
Maksimalna udaljenost	100 m access point in free field
Masa proizvoda	0,04 kg

Okruženje

Relativna vlažnost	90 % pri -20...55 °C, bez kondenzacije u skladu sa ETSI EN 300 440-1
Klasa zaštite protiv električnog udara	Klasa II u skladu sa IEC 61140

Pakovanje


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4,0 cm
Package 1 Width	10,0 cm
Package 1 Length	22,0 cm
Package 1 Weight	54,0 g
Unit Type of Package 2	S02
Number of Units in Package 2	50
Package 2 Height	15,0 cm
Package 2 Width	30,0 cm
Package 2 Length	40,0 cm
Package 2 Weight	3,036 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
EU RoHS direktiva	Proaktivna usaglašenost (proizvod nije u zakonskom okviru direktive EU RoHS)
Bez žive	Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Informacije o RoHS izuzecima	 Da
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
Profil cirkularnosti	 Informacije O Kraju Radnog Veka
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Clearances

Maximum Distance between Transmitter and the Access Point in a Metal Enclosure with an External Antenna

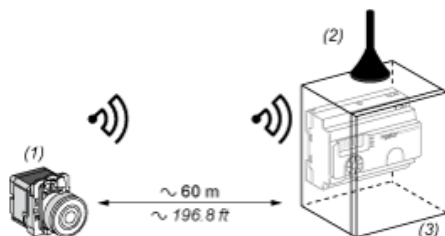

- (1) Transmitter
- (2) External Antenna
- (3) Access Point in a Metal enclosure

The range is reduced if the transmitter is placed in a metal enclosure (reduction factor : approx 10%)

Glass window	10...20 %
Plaster wall	30...45 %
Brick wall	60 %
Concrete wall	70...80 %
Metal structure	50...100 %