

# Lista sa podacima o proizvodima

Specifikacije



Dvostruki USB punjač, Asfora, tip A+C, 21W, mehanizam sa okvirom za pričvršćivanje, antracit

EPH2700571

**Cena\* bez PDV-a: 3.474,90 RSD**

## Osnovne informacije

Grupa proizvoda	Asfora
Tip proizvoda ili komponente	USB punjač
Prezentacija uređaja	Mehanizam sa montažnim ramom
Montaža uređaja	Ugradno
Type of USB power supply	USB type A + C
nijansa boje	Antracit

## Dopunske informacije

Primena uređaja	Punjač
Način pričvršćivanja	Sa zavrtnjima bez matice
Broj izlazne struje	3 A
Integrirani načini povezivanja	1 USB tip A 5 V DC, maksimalna struja opterećenja: 3 A 1 USB type C <= 20 V DC, maksimalna struja opterećenja: 3 A
[ue] nazivni napon	220...240 V AC +/- 10 % pri 50/60 Hz
Maksimalna potrošnja u w	0,05 W
Nazivna izlazna snaga	21 W
Tip opterećenja	Power delivery
Završna obrada	Sjajno
Obrada površine	Neobrađeno
Materijal	ABS (akrilonitril-butadien-stiren): centralna pločica PC (polikarbonat) GF10 FR: kućište
Tip pakovanja	Kutija sa evrootvorom
Količina po setu	1
maximum power consumption in W	15 W USB tip A 5 V 3 A 18 W USB tip A 9 V 2 A 18 W USB tip A 12 V 1.5 A 15 W USB type C 5 V 3 A 21 W USB type C 9 V 2.3 A 21 W USB type C 12 V 1.75 A 17 W USB type A + C 5 V 3.4 A 12 W USB type A + C 5 V 2.4 A
Tip priključka	USB A+C
Kapacitet priključaka	2 x 0.75...2 x 2.5 mm <sup>2</sup> za kruti kabl(ovi) 2 x 0.75...2 x 2.5 mm <sup>2</sup> za fleksibilni kabl(ovi) 2 x 0.75...2 x 2.5 mm <sup>2</sup> za višezični kabl(ovi)
Servisni vek u satima	30000 sati

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

<b>Tip zaštite</b>	Zaštita od preopterećenja i kratkog spoja Prenaponska zaštita na izlazu Zaštita od povećanja temperature
<b>Broj priključaka</b>	2 vijčani priključci
<b>Dužina ogoljenog dela žice</b>	8 mm
<b>kompatibilnost proizvoda</b>	Pametni telefon Mobilni uređaj/tablet Tablet PC Power bank Digital camera Mouse Apple HW Samsung
<b>Ik stepen zaštite</b>	IK02
<b>Ip stepen zaštite</b>	240 W
<b>Visina</b>	71 mm
<b>Širina</b>	71 mm
<b>Dubina</b>	42 mm
<b>Dubina za ugradnju</b>	32 mm
<b>Masa proizvoda</b>	0,13 kg

## Okruženje

<b>Standardi</b>	ETSI EN 301 489-4
<b>Temperatura okoline za rad uređaja</b>	0...40 °C
<b>Temperatura okoline za skladištenje</b>	-5...50 °C
<b>Sertifikacija proizvoda</b>	puno opterećenje
<b>Električna klasa izolacije</b>	Klasa II

## Pakovanje

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	8,300 cm
<b>Package 1 Width</b>	6,300 cm
<b>Package 1 Length</b>	8,300 cm
<b>Package 1 Weight</b>	114,000 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	24
<b>Package 2 Height</b>	15,000 cm
<b>Package 2 Width</b>	30,000 cm
<b>Package 2 Length</b>	40,000 cm
<b>Package 2 Weight</b>	2,996 kg
<b>Unit Type of Package 3</b>	P12
<b>Number of Units in Package 3</b>	768
<b>Package 3 Height</b>	90,000 cm
<b>Package 3 Width</b>	80,000 cm

---

**Package 3 Length** 120,000 cm

---

**Package 3 Weight** 107,872 kg

## Environmental Data

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

[Objašnjeni Environmental Data >](#)

[Kako procenjujemo održivost proizvoda >](#)

### Ekološki otisak

Emisija ugljenika (kg CO2 eq.)

14

Izjava o zaštiti okoline

[Profil ekološke prihvatljivosti proizvoda](#)

### Use Better

#### Materijali i pakovanje

Pakovanje sa recikliranim kartonom

Ne

Pakovanje bez plastike

Ne

[EU RoHS direktiva](#)

Usaglašeno sa izuzecima

SCIP broj

751c35a0-13a5-47c8-b55f-a7498a39b73d

Uredba REACH

[REACH deklaracija](#)

Bez silikona

Ne

### Use Again

#### Prepakovanje i prefabrikovanje

Profil cirkularnosti

[Informacije o kraju radnog veka](#)

Povraćaj

No

WEEE




Proizvod se mora odložiti na tržišta Evropske unije nakon posebnog sakupljanja otpada i nikada ne završiti u kanti za smeće.

Technical Illustration

Wiring diagram

---

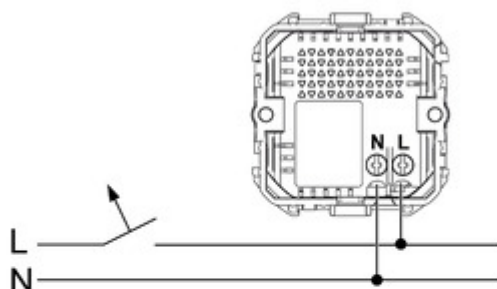

**⚠ ⚠ DANGER**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH**

The product must be installed and connected by a qualified electrician.  
A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Image of product / Alternate images

Alternative

---

