

Lista sa podacima o proizvodima

Specifikacije



Dvostruki USB punjač, Asfora, tip A+C, 21W, kompletan proizvod, krem

EPH2700523

Cena* bez PDV-a: 3.322,80 RSD

Osnovne informacije

Grupa proizvoda	Asfora
Tip proizvoda ili komponente	USB punjač
Prezentacija uređaja	Kompletan proizvod
Montaža uređaja	Ugradno
Type of USB power supply	USB type A + C
nijansa boje	Krem

Dopunske informacije

Primena uređaja	Punjač
Način pričvršćivanja	Sa zavrtnjima bez matice
Broj izlazne struje	3 A
Integrirani načini povezivanja	1 USB tip A 5 V DC, maksimalna struja opterećenja: 3 A 1 USB type C <= 20 V DC, maksimalna struja opterećenja: 3 A
[ue] nazivni napon	220...240 V AC +/- 10 % pri 50/60 Hz
Maksimalna potrošnja u w	0,05 W
Nazivna izlazna snaga	21 W
Tip opterećenja	Power delivery
Završna obrada	Sjajno
Obrada površine	Neobrađeno
Materijal	ABS (akrilonitril-butadien-stiren): centralna pločica PC (polikarbonat) GF10 FR: kućište
Tip pakovanja	Kutija sa evrootvorom
Količina po setu	1
maximum power consumption in W	15 W USB tip A 5 V 3 A 18 W USB tip A 9 V 2 A 18 W USB tip A 12 V 1.5 A 15 W USB type C 5 V 3 A 21 W USB type C 9 V 2.3 A 21 W USB type C 12 V 1.75 A 17 W USB type A + C 5 V 3.4 A 12 W USB type A + C 5 V 2.4 A
Tip priključka	USB A+C
Kapacitet priključaka	2 x 0.75...2 x 2.5 mm² za kruti kabl(ovi) 2 x 0.75...2 x 2.5 mm² za fleksibilni kabl(ovi) 2 x 0.75...2 x 2.5 mm² za višežični kabl(ovi)
Servisni vek u satima	30000 sati

Sve cene koje su navedene u ovom cenovniku su informativne i neobavezujuće, bez PDV-a, isključivo u odnosu na ovlašćene distributere kompanije Schneider Electric. Svi prikazi, opisi i tehničke specifikacije i podaci u ovom cenovniku su podložni promenama od strane kompanije Schneider Electric bez prethodne najave.

Odricanje odgovornosti: Ova dokumentacija nije namenjena kao zamena i ne treba je koristiti za utvrđivanje podobnosti ili pouzdanosti ovih proizvoda za određene namene

Tip zaštite	Zaštita od preopterećenja i kratkog spoja Prenaponska zaštita na izlazu Zaštita od povećanja temperature
Broj priključaka	2 vijčani priključci
Dužina ogoljenog dela žice	8 mm
kompatibilnost proizvoda	Pametni telefon Mobilni uređaj/tablet Tablet PC Power bank Digital camera Mouse Apple HW Samsung
Ik stepen zaštite	IK02
Ip stepen zaštite	240 W
Visina	83 mm
Širina	83 mm
Dubina	43 mm
Dubina za ugradnju	32 mm
Masa proizvoda	0,13 kg

Okruženje

Standardi	ETSI EN 301 489-4
Temperatura okoline za rad uređaja	0...40 °C
Temperatura okoline za skladištenje	-5...50 °C
Sertifikacija proizvoda	puno opterećenje
Električna klasa izolacije	Klasa II

Pakovanje

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8,300 cm
Package 1 Width	6,300 cm
Package 1 Length	8,300 cm
Package 1 Weight	126,000 g
Unit Type of Package 2	S02
Number of Units in Package 2	24
Package 2 Height	15,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	3,284 kg
Unit Type of Package 3	P12
Number of Units in Package 3	768
Package 3 Height	90,000 cm
Package 3 Width	80,000 cm

Package 3 Length	120,000 cm
Package 3 Weight	117,088 kg

Schneider Electric namerava da postigne nulti status do 2050. godine kroz partnerstva sa lancem snabdevanja, materijale sa manjim uticajem i cirkularnost kroz našu tekuću kampanju "Use Better, Use Longer, Use Again" za produženje životnog veka proizvoda i reciklaže.

Objašnjeni Environmental Data >

Kako procenjujemo održivost proizvoda >

Ekološki otisak	
Emisija ugljenika (kg CO2 eq.)	15
Izjava o zaštiti okoline	Profil ekološke prihvatljivosti proizvoda

Use Better


Materijali i pakovanje	
Pakovanje sa recikliranim kartonom	Ne
Pakovanje bez plastike	Ne
EU RoHS direktiva	Usaglašeno sa izuzecima
SCIP broj	751c35a0-13a5-47c8-b55f-a7498a39b73d
Uredba REACH	REACH deklaracija
Bez silikona	Ne

Use Again

Prepakovanje i prefabrikovanje	
Profil cirkularnosti	Informacije o kraju radnog veka
Povraćaj	No
WEEE	 Proizvod se mora odložiti na tržišta Evropske unije nakon posebnog sakupljanja otpada i nikada ne završiti u kanti za smeće.

Technical Illustration

Wiring diagram

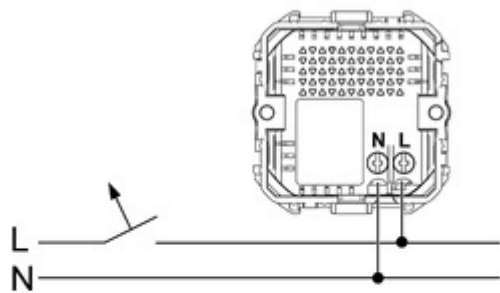

⚠ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- The product must be installed and connected by a qualified electrician.
A qualified electrician must demonstrate an in-depth knowledge of:
- Construction of electrical installations in buildings in accordance with IEC 60364
 - Additional safety standards, local connection rules, and building regulations
 - Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.

Image of product / Alternate images

Alternative



