


Tehničke karakteristike proizvoda

Karakteristike

LA4DWB

TeSys D - interfejs modul - tranzistorski - 24 V
DC / 250 V AC

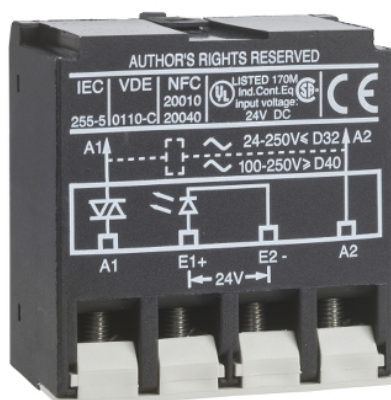

Osnovne informacije

Grupa proizvoda	TeSys
Kratko ime uređaja	LA4D
Broj polova	3P
Tip proizvoda ili komponente	Interfejs modul
Kompatibilnost proizvoda	LC1D09...D115

Dopunske informacije

Način montiranja	Montaža na vrhu
Vrsta tehnologije	Tranzistorska
[us] nazivni napon napajanja	24 V DC
Ograničenje napona upravljačkog kola	5...30 V pri 20 °C DC
[ui] nazivni napon izolacije	250 V - for control circuit conforming to IEC 60947-5-1
Povezivanje - priključci	Control circuit: connector 1 cable(s) 1...2.5 mm ² flexible with cable end Control circuit: connector 1 cable(s) 1...2.5 mm ² flexible without cable end Control circuit: connector 1 cable(s) 1...2.5 mm ² solid with cable end Control circuit: connector 1 cable(s) 1...2.5 mm ² solid without cable end Control circuit: connector 2 cable(s) 1...2.5 mm ² flexible with cable end Control circuit: connector 2 cable(s) 1...2.5 mm ² flexible without cable end Control circuit: connector 2 cable(s) 1...2.5 mm ² solid with cable end Control circuit: connector 2 cable(s) 1...2.5 mm ² solid without cable end
[ue] nazivni napon	Control circuit: 24...250 V AC Control circuit: 380...415 V AC
Potrošnja struje	8.5...15 mA 20 °C
Garantovano trenutno stanje 0	<= 2 mA
Garantovano naponsko stanje 0	< 2.4 V
Garantovano naponsko stanje 1	5 V
Električna trajnost	20 miliona ciklusa pri 240 V
Lokalna signalizacija	LED indikator
Visina	19 mm
Masa proizvoda	0,045 kg

Okruženje

Standardi	IEC 60255-5
Sertifikacija proizvoda	CSA UL
Tip zaštite	Ugrađena sa diodom
Ip stepen zaštite	IP2x conforming to VDE 0106
Zaštitni tretman	TH u skladu sa IEC 60068
Temperatura okoline za rad uređaja	-25...55 °C
Temperatura okoline oko uređaja	-25...70 °C
Temperatura okoline za skladištenje	-40...80 °C

Disipacija toplote	0,4 W za upravljačko kolo
Otpornost na mikroprekide	1 milisekundi

Pakovanje

Pakovanje 1 težina	56 g
Pakovanje 2 težina	4,277 kg

Održivost ponude

Status održive ponude	Green Premium proizvod
Propis REACH	 REACH Deklaracija
REACH bez SVHC	Da
EU RoHS direktiva	Usaglašeno  EU RoHS Deklaracija
Bez toksičnih teških metala	Da
Bez žive	Da
Informacije o RoHS izuzecima	 Da
RoHS regulativa za Kinu	 RoHS Deklaracija Za Kinu
Izjava o zaštiti okoliša	 Profil Ekološke Prihvatljivosti Proizvoda
WEEE	Ovaj proizvod je na tržištima Evropske unije neophodno odložiti u skladu sa specifičnim smernicama za prikupljanje otpada i nikako ne sme da dospe u kontejnere za otpatke.

Ugovorna garancija

Garancija	18 meseci
-----------	-----------