

Product datasheet

Specifications



Easy TeSys contactor 3P(3 NO) - AC-3 - <= 440 V 400A - 220 V AC coil

LC1E400M7

Main

Range	Easy TeSys
Range of product	Easy TeSys Control
Product or component type	Contactor
Device short name	LC1E
Contactor application	Motor control Resistive load
Utilisation category	AC-3 AC-3e AC-1
Poles description	3P
[Ue] rated operational voltage	Power circuit: <= 690 V AC 50/60 Hz
[Ie] rated operational current	400 A (at <55 °C) at <= 440 V AC AC-3 for power circuit 330 A (at <55 °C) at <= 440 V AC AC-3e for power circuit 500 A (at <40 °C) at <= 440 V AC AC-1 for power circuit
[Uc] control circuit voltage	220 V AC 50/60 Hz

Complementary

Motor power kW	110 kW at 220/230 V AC 50/60 Hz 200 kW at 380/400 V AC 220 kW at 415 V AC 250 kW at 440 V AC 257 kW at 500 V AC 280 kW at 660/690 V AC
Pole contact composition	3 NO
[Ith] conventional free air thermal current	500 A (at 40 °C) for power circuit
Irms rated making capacity	4000 A at 440 V AC for power circuit conforming to IEC 60947-4-1
Rated breaking capacity	3200 A at 440 V for power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	3600 A 40 °C - 10 s for power circuit
Associated fuse rating	10 A gG at <= 690 V coordination type 1 for control circuit conforming to IEC 60947-5-1 630 A gG at <= 690 V coordination type 1 for power circuit
Average impedance	0.26 mOhm - Ith 500 A 50 Hz for power circuit
Power dissipation per pole	42 W AC-3 65 W AC-1
[Ui] rated insulation voltage	690 V conforming to IEC 60947-4-1
Overvoltage category	III
Pollution degree	3

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Uimp] rated impulse withstand voltage	8 kV coil not connected to the power circuit conforming to IEC 60947
Mechanical durability	4000000 cycles
Electrical durability	250000 cycles AC-1 600000 cycles AC-3
Control circuit type	AC at 50/60 Hz
Control circuit voltage limits	0.85...1.1 U _c (-5...55 °C):operational 50/60 Hz 0.35...0.5 U _c (-5...55 °C):drop-out 50/60 Hz
Inrush power in VA	1075 VA 50 Hz cos phi 0.9 (at 20 °C) 1075 VA 60 Hz cos phi 0.9 (at 20 °C)
Hold-in power consumption in VA	15 VA 50 Hz cos phi 0.9 (at 20 °C) 15 VA 60 Hz cos phi 0.9 (at 20 °C)
Heat dissipation	14 W for control circuit
Operating time	100...170 ms on opening 40...75 ms on closing
Maximum operating rate	2400 cyc/h 55 °C
Connections - terminals	Power circuit: cable with lug 2 1...4 mm ² - external diameter: 150 mm - cable stiffness: flexible without cable end Power circuit: bars 2 1...4 mm ² - cable stiffness: flexible without cable end - busbar cross section: 30 x 5 mm Control circuit: screw clamp terminals 1 1...4 mm ² - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 1...4 mm ² - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 1...2.5 mm ² - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 1...2.5 mm ² - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 1...4 mm ² - external diameter: 150 mm - cable stiffness: solid without cable end Control circuit: screw clamp terminals 2 1...4 mm ² - cable stiffness: solid without cable end - busbar cross section: 30 x 5 mm
Tightening torque	Control circuit: 1.2 N.m Power circuit: 35 N.m
Minimum switching voltage	17 V for control circuit
Minimum switching current	5 mA for control circuit
Insulation resistance	> 10 MOhm for control circuit
Non-overlap time	1.5 ms on energisation guaranteed between NC and NO contact 1.5 ms on de-energisation guaranteed between NC and NO contact
Mounting support	Plate

Environment

Standards	IEC 60947-4-1 IEC 60947-5-1 IEC 60947-1
Product certifications	EAC CE
IP degree of protection	IP00 conforming to IEC 60529
Permissible ambient air temperature around the device	-20...70 °C at U _c -60...80 °C storage -5...55 °C operation
Operating altitude	3000 m without derating
Fire resistance	850 °C conforming to IEC 60695-2-1

Mechanical robustness	Vibrations contactor open (1.5 Gn, 5...300 Hz) Shocks contactor open (6 Gn for 11 ms) Vibrations contactor closed (5 Gn, 5...300 Hz) Shocks contactor closed (15 Gn for 11 ms)
Height	375 mm
Width	213 mm
Depth	219 mm
Net weight	9.1 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	26.000 cm
Package 1 Width	24.000 cm
Package 1 Length	32.000 cm
Package 1 Weight	9.329 kg
Unit Type of Package 2	S06
Number of Units in Package 2	10
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	106.290 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Total lifecycle Carbon footprint	5835
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration

Use Again

Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Technical Illustration

Assembly's dimensions

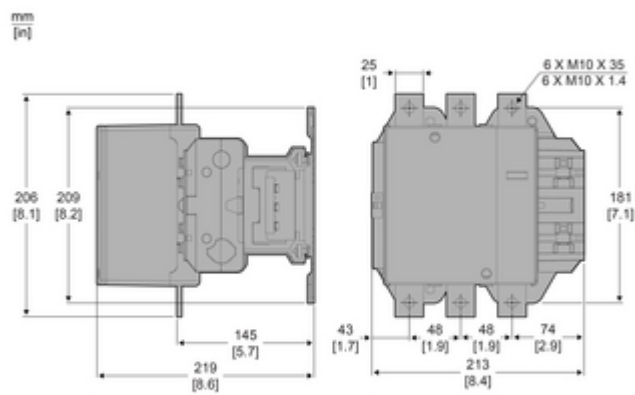

Technical Illustration

Assembly's dimensions

